

VEVOR

Upgrade · The Home Creator Way




PTS102

VEVOR Support Center

Pet Bike Trailer

MODEL: PTS102

MODEL: PTS102

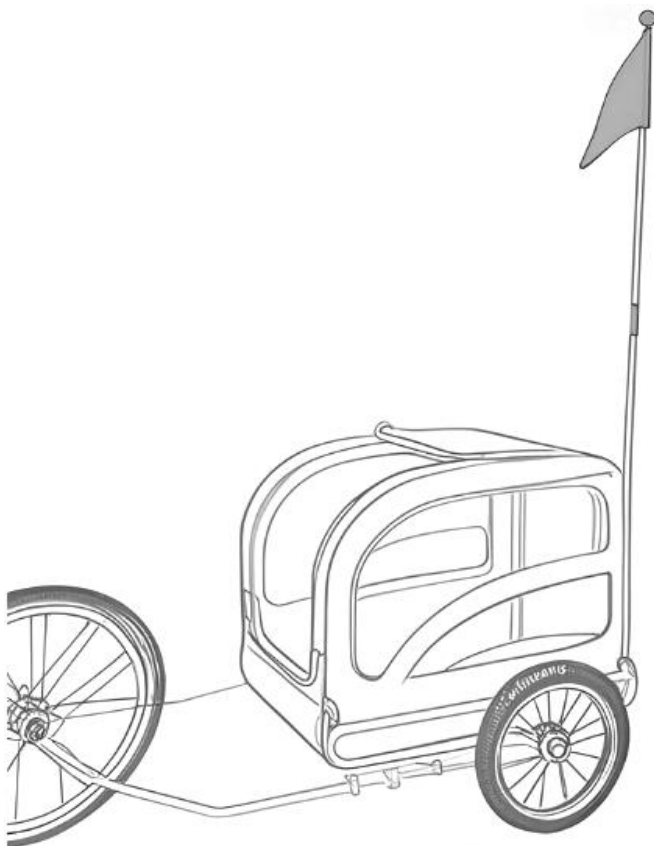


Important: Keep these instructions for future reference

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

NOTICE

- * Never exceed a safe speed. Recommended maximum speed is 8 MPH (13 KMH) and slowing to no more than 3 MPH (5 KMH) when turning.
- * The items in the picture below are trailer protection parts, please discard them:



SAFETY INSTRUCTIONS

WARNING

Do read instructions before driving. Failure to comply with the instructions and warnings in this manual could result in serious injury or death.


1. Warning-To reduce the risk of injury, user must read instructions manual carefully.
2. The product complies with relevant standards and regulations. Installation of this device must comply with all applicable regulations, and it should only be operated in well-ventilated areas. Please read the user manual before installing and using this equipment.
3. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
4. Children shall not play with the appliance.
5. This product is intended to be used in household and similar applications such as: walk a pet/transport a pet.
6. Please properly keep product. Check whether the product is abnormal before use. If it is abnormal, please stop using it.
7. Please use the product according to the intended use, warn of potential injury from misuse.

- Consult a veterinarian to ensure it is safe for your pet to ride in a trailer.
 - Make sure pet cannot make contact with the wheel spokes.
 - Check comfort and safety of pet frequently, especially during hot or cold weather.
 - Never leave pet unattended and **ALWAYS HOLD THE TRAILER/STROLLER FROM TIPPING BACKWARD WHEN DOG IS ENTERING OR LEAVING THE TRAILER.**
 - DO NOT use with a total load that exceeds 100 lbs.
 - Pet trailer suitable for 22"–28" bicycle.
 - Never use pet trailer for transporting child or cargo.
 - DO NOT make any modifications to the product. Any parcels placed on the trailer may cause the trailer to become unstable.
 - DO NOT over-inflate the tires. Failure to comply with the rated pressure on the tire sidewall may lead to explosion of the tire and possible injury.
 - Before each ride, be sure the trailer does not interfere with braking, pedaling or steering of the bicycle.
-
- Always comply with local regulations when using the trailer on public roadways.
 - Make sure that your pet is securely linked with harness and leash (not in bundle).
 - Keep small parts away from children during assembly.
 - Always use the flag supplied with the trailer to allow others to see you.
 - Never ride a bicycle at night without adequate lighting. Obey all local legal requirements for lighting.
 - When using your trailer, you are towing extra weight and a bigger vehicle. You must allow more time for braking, slowing, stopping and starting, and allow more room for turns and passageways. Experiment with the loaded trailer in an uncongested area until you become familiar with how your bike handles towing a trailer.
 - Avoid rocks, curbs, hard braking and sudden swerving. Avoid riding over obstacles with one wheel, as this may cause the trailer to tip over.
 - Always ride with the front and rear doors fully closed to protect pet from flying debris and prevent pet from jumping from the trailer

- The rider of the bicycle must be at least 16 years old.
- Trailer weight must be properly distributed for safe handling. The weight on the hitch connector should be between 30 N (≈ 6.6 lbs. or 3 kg) and 80 N (≈ 17.6 lbs. or 8 kg). To measure this, load your trailer and place it next to bathroom scale. Step on scale and make a note of your weight. Standing on scale, lift up the end of the tow bar one foot (approximately 25cm) off the ground. If the weight is too low, the rear wheel of the bicycle could lose traction. If it is too high the hitch may be overloaded.

Never overload the trailer and never ride with a tow bar load that is outside the specified range of 6.6 to 17.6 lbs. (3 – 8 kg). Always distribute the load evenly. Failure to do so could result in accidents with serious injury or death.

Tip: Make sure that your dog is positioned with its center of gravity as close as possible to the wheel axle. This is the best way to ride with an optimal weight distribution.

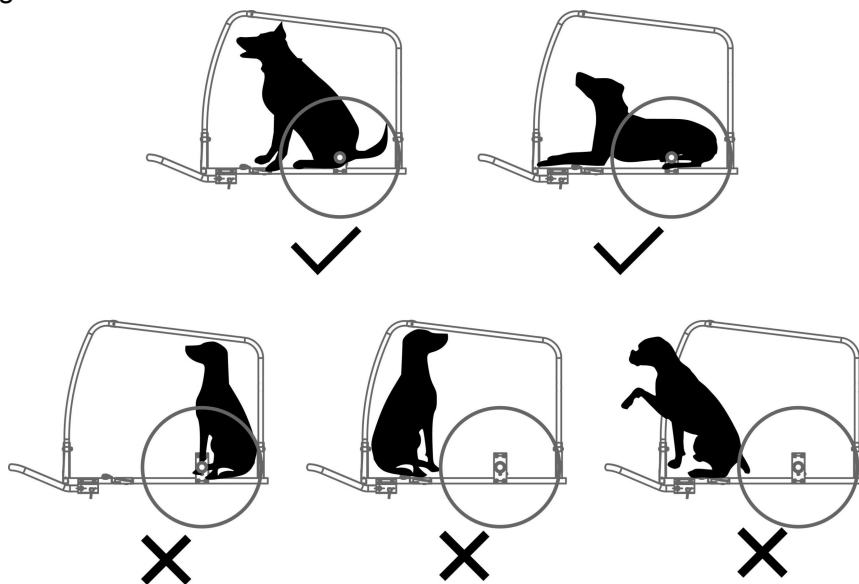

How to habituate your dog to the trailer:

Please take enough time and choose a quiet place So that you can train your dog without any disturbances, which might get him distracted or alarmed. Furthermore, it is important to choose an even surface, like an asphalted surface. The dog should wear a harness. The rear door should be opened while the front door should be closed. If possible take a second person to assist.

To accustom the dog to the bicycle trailer, the training will be ideally carried out in 3 steps:

Step 1: The dog becomes acquainted with the bicycle trailer.

1. An assistant will safely hold the bike with the trailer during the entire training, and avoid wagging the trailer back and forth when riding. Lead your dog through the rear door inside the trailer and secure him with the short lead.
2. Close the rear door and open the front door. Praise the dog properly and give him a treat.
3. Close the front door again and open the rear door. Praise and reward your dog and let him get out on command.

Step 2: The dog becomes acquainted with the trailer's motion.

1. The assistant safely holds the bike and trailer again while you guide the dog into the trailer. Attach the short lead to the dog's harness.
2. Close the rear door again and reward your dog by giving him a treat through the front door.
3. When the dog sits still, the assistant slowly starts riding the bike with the trailer. Walk alongside the trailer and praise your dog properly.
 - ★ If the dog becomes anxious, stop the trailer. As soon as the dog has calmed down, reward it with a treat and stop the training as in Step 1.


Step 3: Riding with bike and trailer

1. The assistant again safely holds the bike and trailer while you guide the dog into the trailer and attach the short lead to the dog's harness.
2. Close the rear door and reward your dog by giving him a treat through the front door.
3. When the dog sits still, the assistant slowly starts to ride the bike with the trailer. Walk alongside the trailer and give your dog some treats.
 - ★ If the dog becomes anxious, stop cycling. Wait until the dog calms down and give him a treat while standing still. Gently start riding the bike with trailer again (as in Step 2) and after a short time, finish the training as in Step 1 or Step 2.
 - ★ If the dog keeps calm, stop the training as described after approximately 2 minutes.
 - ★ If the dog stays calm, you can extend the ride time step-by-step and cycle without an assistant. Repeat Step 3 as necessary until your dog gets used to riding in the trailer.

MODEL AND PARAMETERS

Model	PTS102
Type	Tow
Max. Load	100lbs
Bin Size	31.9*21.9*25.2inch
Wheels	Steel, 16*1.75inch
Material	Steel, 600D Oxford cloth
Color	Red & Black

CONTENTS

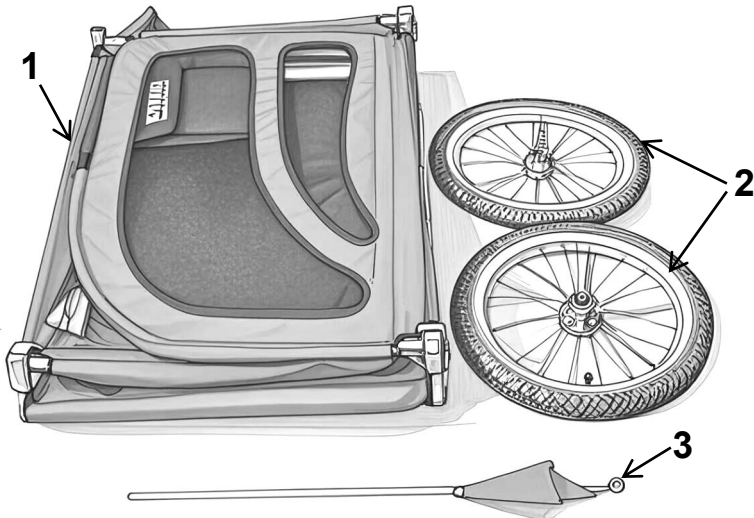


1.Frame*1

2.Rear Wheel*2

3.Flag*1

ASSEMBLE


A-- Frame development

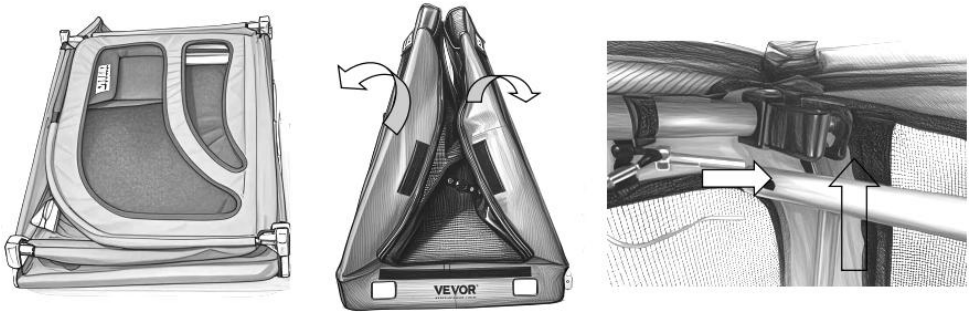

B--Tow bar development




C--Install and remove wheels



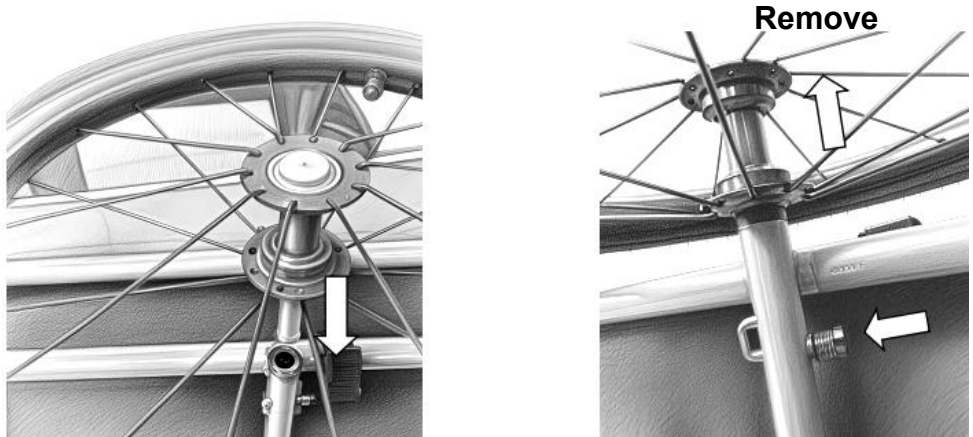


Attention: Pull out gently to check whether it is locked! If the air pressure is insufficient, please inflate.
Please use the matching air nozzle to inflate.

(American-style nozzle)

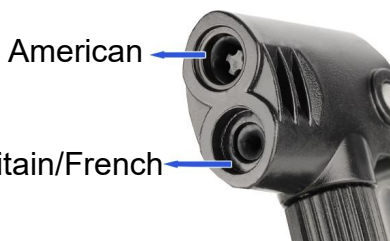

D--Attached bicycle



1. Quick-release Axle: Remove the quick-release from the left side of bike's rear axle. Install the hitch between the quick-release and frame. Tighten the quick-release following the bike manufacturer's manual. Hitch can remain on the bike when the trailer is removed (Figure 1).

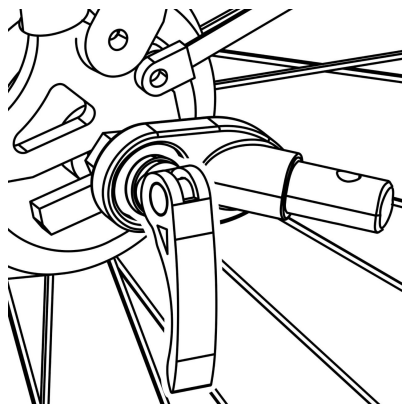


Figure 1

⚠ WARNING

The tension-adjusting nut must engage the threads for at least five full turns in order to ensure adequate clamping force for holding the rear wheel securely. Failure to tighten the tension-adjusting nut fully may result in accidents with serious injury or death. If the quick-release skewer is too short, it must be replaced. Consult a professional bicycle mechanic for the appropriate parts and assistance.

2. Nutted Axle: Unscrew the nut with washer from the left side of bike's rear axle. Install the hitch onto the axle and screw the nut back on with the washer(Figure 2).

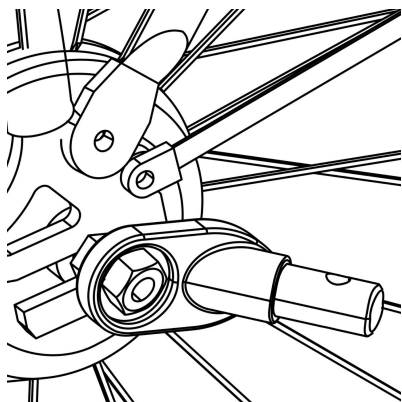


Figure 2

⚠ WARNING

The axle nut must engage the threads for at least five full turns in order to ensure adequate clamping force for holding the rear wheel securely. Failure to tighten the nut fully may result in accidents with serious injury or death. If the axle is too short, the Universal Hitch cannot be used! Consult a professional bicycle mechanic for the appropriate parts and assistance.

3. Thru Axle: The universal hitch doesn't fit a bike with thru axle. Please consult the retailer for possible solution.



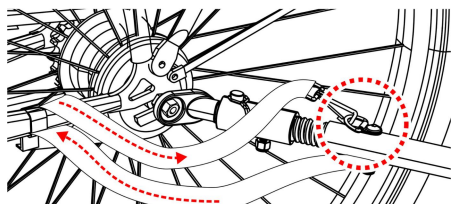


Figure 3

Connect the coupler on the tow bar and secure the safety pin (Figure 3). Once the tow bar is attached, wrap safety belt around the frame of the bike and hook onto the D-ring on the tow bar.

E-- Flag-mounting

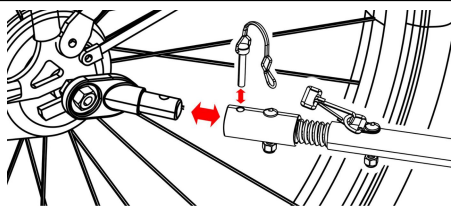

F-- Door for use



BEFORE YOU RIDE

Check before each use:

1. Wheels are properly secured to the trailer.
2. Tires are inflated to recommended pressure on the tire side wall.
3. Tow bar is properly secured to the trailer.
4. Hitch is properly secured to the bicycle.
5. All safety pins are securely locked in place.
6. Safety strap on the tow bar is properly installed.
7. Weight of tow bar at coupler is greater than 6.6 lbs. (3 kg) but does not exceed 17.6 lbs. (8 kg) with fully loaded trailer.
8. Make sure that bicycle is in proper working order, especially brakes and tires. (Refer to bicycle manufacturer's instructions.)
9. Safety flag is in place.
10. Always leash your dog/pet in the trailer.

MAINTENANCE

Storage: For longer product life, store trailer indoors. The trailer should not be stored at temperatures less than -10°F (-23°C) or greater than 150°F (65°C).

Fabric Care: Hand wash fabric parts with warm water and mild soap. DO NOT use bleach or solvents. Wipe dry and store out of direct sunlight in a dry, well-ventilated area. Clean windows with a damp, soft cloth.

