VEVOR



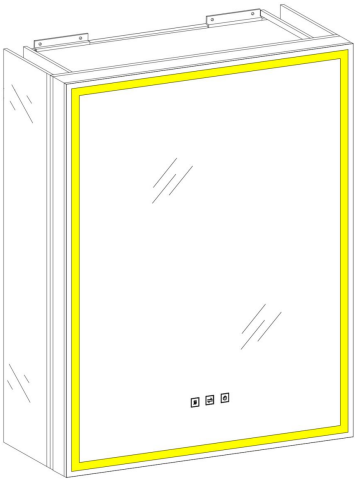
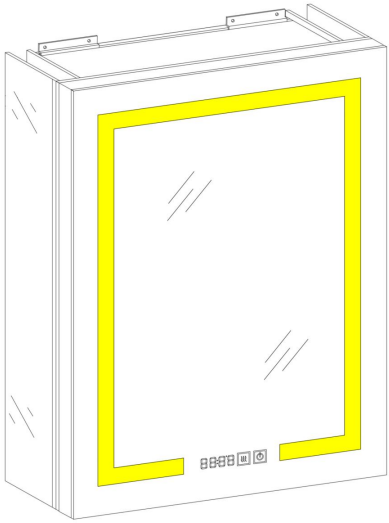
Upgrade · The Home Creator Way





Mirror Cabinet

MODEL: CAS-305, CAD-305, CSS-305, CSD-305, CST-305, KR-303, KR-305, CTS-303, CAD-304

VEVOR Support Center

1	CAS-305		6	KR-303	
2	CAD-305		7	KR-305	
3	CSS-305		8	CTS-303	
4	CSD-305		9	CAD-304	
5	CST-305				

CAS-305	CAD-305
	
CSS-305 / CST-305	**CSD-305**
	
KR-303	**KR-305**

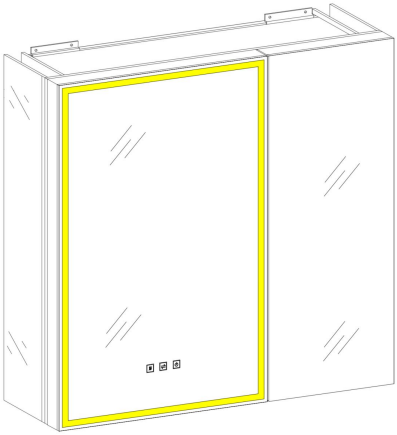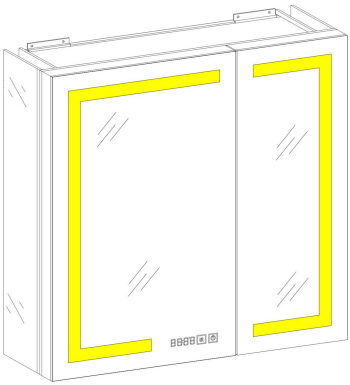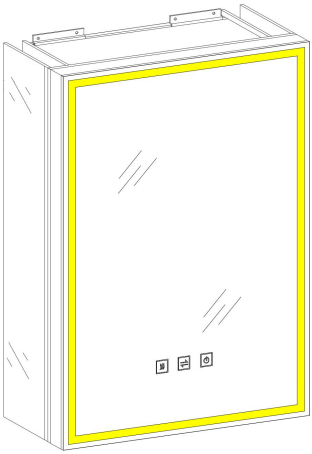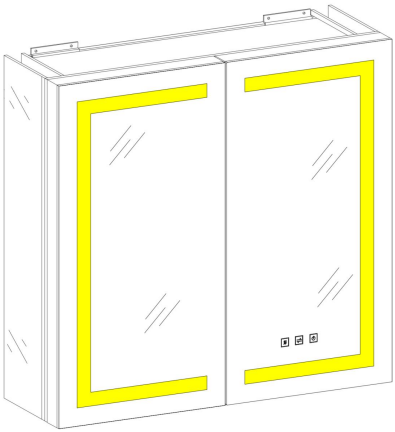	
CTS-303	**CAD-304**
	

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.

	FCC Information(FCC ID: 2BLHK-CAT305): **CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment! This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) This product may cause harmful interference. 2)This product must accept any interference received, including interference that may cause undesired operation. **WARNING:** Changes or modifications to this product not expressly approved by the party.responsible for compliance could void the user's authority to operate the product. **Note:** This product has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception,which can be determined by turning the product off and on, the user is encouraged to try to correct the interference by one or more of the following measures. · Reorient or relocate the receiving antenna. · Increase the distance between the product and receiver. · Connect the product to an outlet on a circuit different from that to which the receiver is connected. · Consult the dealer or an experienced radio/TV technician for assistance.
	Warning- For Indoor Use Only

	This product is of protection class II. That means it is equipped with enhanced or double insulation.
	**CORRECT DISPOSAL:** This product is subject to the provision of European Directive 2012/19/EC. The symbol showing a wheelie bin crossed through indicates that the product requires separate refuse collection in the European Union. This applies to the product and all accessories marked with this symbol. Products marked as such may not be discarded with normal domestic waste, but must be taken to a collection point for recycling electrical and electronic devices

INSTRUCTIONS

Warning-To reduce the risk of injury, user must read instructions manual carefully. The product complies with relevant standards and regulations. Installation of this device must comply with all applicable regulations, and it should only be operated in well-ventilated areas. Please read the user manual before installing and using this equipment.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children shall not play with the appliance.

This appliance shall not be used by children. Keep the appliance and its cord out of reach of children.

This appliance is intended to be used in household and similar applications such as:

- staff kitchen areas in shops, offices and other working environments;
- farm houses;
- by clients in hotels, motels and other residential type environments;
- bed and breakfast type environments.

Please properly keep product. Check whether the product is abnormal before use. If it is abnormal, please stop using it.

Please use the product according to the intended use, warn of potential injury from misuse.
If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
Not suitable for environments with high humidity, explosive atmospheres, salt spray, acidic or alkaline conditions.

DANGER
Risk of personal injury. To avoid possible electrical shock, the electricity must be turned off at the circuit breaker or fuse box before attempting any installation procedure.
Risk of personal injury. To avoid possible electrical shock the mirror must be properly grounded.

CAUTION
Total/Maximum shelf load 34lbs/15.2kg

GROUNDINGINSTRUCTIONS
This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.

WARNING
An Electrical option cabinet must be wired to a 20 Amp GFI(Ground Fault interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.
To reduce the risk of burns, fire, electric shock or injury to persons. Use this furnishing only for it's intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. Never drop or insert any object into any opening. Do not use outdoors.
Risk of electric shock. Connect this furnishing to a properly grounded circuit only. See Grounding instruction.
This product can be used by persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given

supervision or instruction concerning use of the appliance in a safe way and if they understand the hazards involved.
Children shall not play with the product warn of potential injury from misuse.
Always disconnect the product from the supply if it is left unattended and before assembling or cleaning.
If the product is damaged, it must be replaced or repair by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
Type Y attachment: If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

CAUTION:
1.During operation, never use hard and sharp materials directly against the mirror surface, or otherwise, it may result in damage and even personal injury accident.
2.Clean the product with soft cloth and mild detergent. Do not use abrasives or chemical cleaners, or leave any chemicals on the surface such as bath solution shampoo as they may damage the mirror.
Note: To ensure general use of this product please follow the installation instructions carefully. Must be installed indoors and on a suitable load bearing wall. Installation should be done by a licensed contractor and/or electrician. Only a clean soft cloth should be used to clean this product.

SAVE THESE INSTRUCTIONS




Installation instructions

Model	W×H	Input Range	Power	Color	Installation
CAS-305	20″X26″	AC115-120V/ 60Hz	27W	Silvery	Surface Mounted or Recessed Mount
CAD-305	20″X28″		32W	Black	
CSS-305	20″X28″		33W	Black	
CSD-305	24″X30″		28W	Silvery	
CST-305	24″X32″		38W	Silvery	

KR-303	30″X28″		35W	Black	
KR-305	36″X30″		48W	Silvery	
CTS-303	50X70cm	AC220-240V, 50-60Hz	30W	Black	
CAD-304	65X65cm		38W	Silvery	

Part List

When unpacking this product, ensure the parts listed below are included and carefully inspect for any damage that may have occurred during transit. Do not attempt to assemble or use the product if any part is missing or damaged.

Model	 Cabinet	 Brackets	 Anchor & Screw	 Shelf Clips(L&R)	 Glass Shelve(s)	 Magnification	 Plug
CAS-305	1 PCS	3 PCS	6&6 PCS	3&3 PCS	3 PCS	0 PCS	10 PCS
CAD-305	1 PCS	3 PCS	6&6 PCS	3&3 PCS	3 PCS	0 PCS	10 PCS
CSS-305	1 PCS	3 PCS	6&6 PCS	2&2 PCS	2 PCS	0 PCS	10 PCS
CSD-305	1 PCS	3 PCS	6&6 PCS	2&2 PCS	2 PCS	0 PCS	10 PCS
CST-305	1 PCS	3 PCS	6&6 PCS	3&3 PCS	3 PCS	1 PCS	10 PCS
KR-303	1 PCS	3 PCS	6&6 PCS	2&2 PCS	2 PCS	0 PCS	10 PCS
KR-305	1 PCS	3 PCS	6&6 PCS	2&2 PCS	2 PCS	0 PCS	10 PCS
CTS-303	1 PCS	3 PCS	6&6 PCS	2&2 PCS	2 PCS	0 PCS	10 PCS
CAD-304	1 PCS	3 PCS	6&6 PCS	2&2 PCS	2 PCS	0 PCS	10 PCS

INSTALLATION METHOD

BEFORE INSTALLATION

To ensure the best experience, please read carefully and follow the instructions provided below before assembling and installing the product.

1. Important Safety Instructions:

Assembly by two or more adults is highly recommended, so as to ensure proper installation.

Before installing, adding, or changing any components. Make sure that the fixing location can support the weight of the entire fixture(e.g. solid stone or brick walls).

To prevent injury, the mirror must be installed as the instructions provided.

2. Pre-assembly :







Inspect the product immediately upon receipt for any transit damage or missing parts.

3. Before Installation


Please check and make sure that the mirror is functioning properly.

1. SURFACE-MOUNT INSTALLATION


Installation Tools (the following tools are not included in the package, you need to prepare them yourself)

<table>
<tr>
<td>Level Ruler
</td>
<td>Marker
</td>
<td>Hammer
</td>
<td>Measuring Tape

</td>
</tr>
<tr>
<td>Drill with Bits

</td>
<td>Screwdrivers
</td>
<td>Safety Goggles
</td>
</tr>
</table>


2. Installation Instructions(Surface Mounted):




Fig①: Unpack the "E" and "F" mounting brackets.




Fig②: Install the "F" bracket using the "A" anchor and "B". Make sure the "F" bracket is in the horizontal position.




Fig③: Lift the medicine cabinet and securely place in the "F" bracket as shown in the illustration.




Fig④: Hold the cabinet in the upright position and securely fasten the "E" bracket in the grove on top of the cabinet.




Fig⑤: Use "A" anchor and "B" screw through the mounting hole to secure the "E" bracket to the wall.







Fig⑦: Insert the provided shelf clips (L/R) into the round holes on both sides of the cabinet.




Fig⑧: After installing the shelf clips, insert the glass shelve(s) .



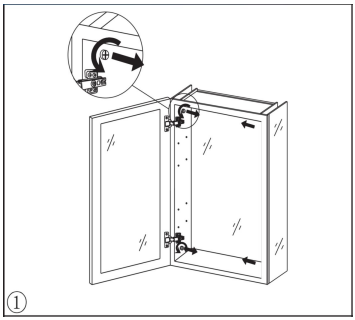
3. Installation Instructions(Recessed Mounted):




Fig①: Open the mirror cabinet and remove the screws on the top and bottom of both sides (note that the glass on both sides of the mirror cabinet falls off)




Fig②: Remove the glass on both sides of the mirror cabinet, save the glass and screws.




Fig③: Put into the wall.

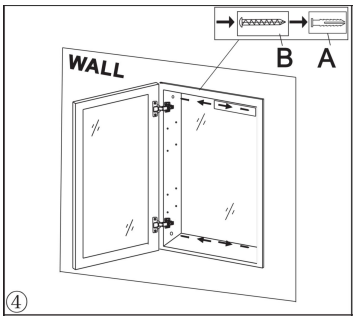


Fig④: Install them in order as shown in the figure to fix the box to the wall.



Fig⑤: Insert the provided shelf clips (L/R) into the round holes on both sides of the cabinet.



Fig⑥: After installing the shelf clips, insert the glass shelve(s).



Operation Method (Three buttons)



Short press the switch to turn on and turn off the light; when the light is on, long press the switch to adjust the brightness of the light.

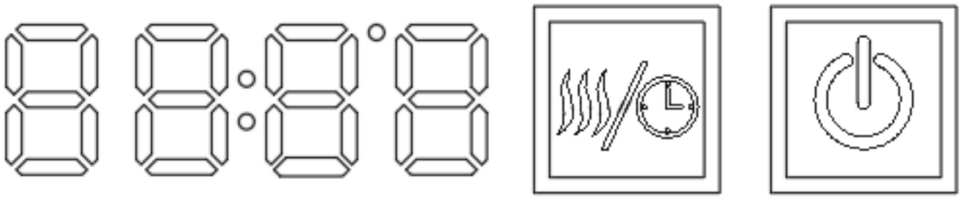


When turning on the light, short press the middle button to change the light color temperature, each time turn on the light memory when turning off the light, such as :
1 way bright →2 way bright →1+2 way bright → off the light →1+2 way bright →1 way bright →2 way bright, switch in turn; Press and hold continuously to adjust the color temperature of the light.



Press the anti-fog button to open the defogging function. The defogging function will shut down automatically after one hour without operation.

Operation Method (Two buttons)





The switch controls the light ON/OFF, keep pressing the on/off switch 2 seconds to adjust the brightness from 10% to 100% ,short press the On/Off switch, the lighting color temperature can be adjust to either 3000k / 4500k /6400k, brightness memory: When the light is turned on it will remain the last turn-off brightness level.



Short press the defogging button to turn on or off the defogging function.After turning on the defogging function, it will automatically turn off the defogging function if there is no operation within 1 hour. Long press the defogging button for 2 seconds to enter the setting

mode, the 24-hour format font jumps, short press to switch to 12h/24h hour format; long press for 2 seconds to switch to hour setting; the setting sequence is 12h/24h→hour→minute→ Celsius/Fahrenheit Degrees→Exit Settings. In setting mode, short press to adjust time, switch hour and temperature unit, long press for 2 seconds to switch to the next setting mode until exiting setting mode. If there is no operation, it will exit the setting mode directly after 5 seconds.

Zhongshan Kaitze Home Improvement Co,.Ltd
Address: No.5 of yongyi fourth road, Henglan town, Zhongshan, China
E-mail: support@vevor.com

