



Upgrade · The Home Creator Way

UNDERLAYMENT

MODEL:EPE30-2(1ROLL/PACK)-200SF

EPE20-2(3ROLLS/PACK)-100SF

EPE20-2(6ROLLS/PACK)-100SF/30IXPE30-L(G)-200SF/

FELT30-5(1ROLL/PACK)-100SF/

FELT30-5(2ROLL/PACK)-200SF/FELT30-5(1ROLL/PACK)-200SF

VEVOR Support Center


1	EPE30-2(1ROLL/PACK)-200SF		2	EPE20-2(3ROLLS/PACK)-100SF	
3	EPE20-2(6ROLLS/PACK)-100SF		4	30IXPE30-L(G)-200SF	
5	FELT30-5(1ROLL/PACK)-200SF		6	FELT30-5(2ROLL/PACK)-200SF	
7	FELT30-5(1ROLL/PACK)-100SF				

MODEL:MODEL:EPE30-2(1ROLL/PACK)-200SF

EPE20-2(3ROLLS/PACK)-100SF

EPE20-2(6ROLLS/PACK)-100SF

30IXPE30-L(G)-200SF/FELT30-5(1ROLL/PACK)-100SF/FELT30-5(2ROLL/PACK)-200SF/FELT30-5(1ROLL/PACK)-200SF

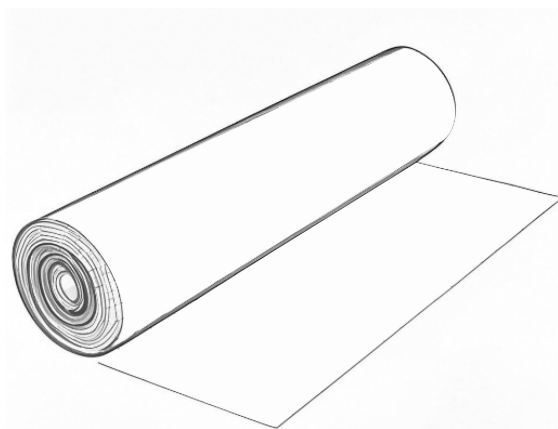

The picture is for reference only. Please refer to the actual product.

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.



Warning-To reduce the risk of injury, user must read instructions manual carefully.

1 Warning- To reduce the risk of injury, user must read instructions manual carefully.

2 The product complies with relevant standards and regulations.

Installation of this device must comply with all applicable regulations, and it should only be operated in well-ventilated areas. Please read the user manual before installing and using this equipment.

3 This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

4 Children shall not play with the appliance.

5 This appliance is intended to be used in household and similar applications such as:

staff kitchen areas in shops, offices and other working environments;
farm houses;

by clients in hotels, motels and other residential type environments;
bed and breakfast type environments.

6 Please properly keep product. Check whether the product is abnormal before use. If it is abnormal, please stop using it.

7 Please use the product according to the intended use, warn of potential injury from misuse.

PARAMETER LIST

Model	Single volume size(mm/pcs)	Quantity(pcs)
EPE30-2(1roll/pack)-200sf	16900×1100×3	1
EPE20-2(3rolls/pack)-100sf	8470×1100×2	3
EPE20-2(6rolls/pack)-100sf	8470×1100×2	6
30IXPE30-L(G)-200sf	16900×1100×3	1

FELT30-5(1roll/pack)-200sf	18600×1000×3	1
FELT30-5(2roll/pack)-200sf	18600×1000×3	2
FELT30-5(1roll/pack)-100sf	9300×1000×3	1

WARNING:

1. Please read this manual carefully before using the product.
2. Flammable: Keep away from open flame. This product will ignite and burn if brought into contact with an open flame.
3. Keep away from sharp points, blades and other items, so as not to scratch the product.
4. This product is not a toy, Underlayment cannot be used as toys for children to play with.

SAVE THESE INSTRUCTION

DIRECTION FOR USE

1. Pre-construction preparation

- Grassroots treatment: ensure that the ground is flat and dry, with moisture content less than or equal to 12%, fill the cracks and depressions with cement mortar, and control the flatness error within 3mm/2m.
- Material inspection: check whether the padding is damaged, layered or has an odor after opening the box, confirm that the thickness (commonly 2-5mm), width and floor specifications are compatible, and the recycled fiber is evenly distributed without lumps.

2. Construction operation specifications

- Laying direction: the padding should be perpendicular to the laying direction of the wooden floor, and the width of the adjacent two pieces should not be less than 15cm. Use special tape to seal the joint to prevent water vapor penetration.
- Corner treatment: in the wall base, pipe and other parts, the padding

should be folded up 5-8cm, and fixed with sealant; when encountering the threshold, it should be laid continuously, not cut off.

- Avoid stretching: when laying, pull and release lightly to avoid excessive stretching that can cause the material to thin or tear, ensuring overall cushioning performance.

3. Cooperate with the floor system

- Floating floor: after the cushion is laid, the lock floor is directly installed to ensure that the floor is tightly attached to the cushion and avoid hollow drum.

- Pasted floor: first lay the padding, wait for the floor glue to dry, then evenly apply the adhesive on the back of the floor, and compact it to fix it.

Later maintenance

- Daily inspection: check the floor surface for signs of dampness and deformation every quarter. If local bulging or odor is found, lift the floor to check whether the padding is damp or moldy.

- Cleaning requirements: avoid using a large amount of water to directly flush the floor, if the pad is exposed, use a vacuum cleaner to clean the surface dust, do not use sharp tools to scrape.

