



Upgrade · The Home Creator Way


FLOATING SHELF BRACKET

MODEL:FT-16-2 \ FT-22-2 \ FT-34-1 \ FT-43-1 \ FT-46-1


VEVOR Support Center

1	FT-16-2		2	FT-34-1	
3	FT-43-1		4	FT-46-1	
5	FT-22-2				


MODEL:FT-16-2 \ FT-22-2 \ FT-34-1 \ FT-43-1 \ FT-46-1



(FT-16-2 \ FT-22-2)



(FT-34-1)



(FT-43-1 \ FT-46-1)

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.






Warning-To reduce the risk of injury, user must read instructions manual carefully.

The product complies with relevant standards and regulations. Installation of this device must comply with all applicable regulations, and it should only be operated in well-ventilated areas. Please read the user manual before installing and using this equipment.

Warnings

- 1.1 Shelf brackets must be correctly installed into studs or wall blocking. Failure to do so may result in sagging shelves, falling objects, or serious injury.
- 1.21 Every bracket weight class and length has been engineered for use with specific shelf capacities/dimensions. Failure to follow our specified capacity ratings and correct shelf dimensions may result in sagging shelves, falling objects, or serious injury.

Part List						
Code	Picture	Qty.				
		FT-16 -2	FT-22 -2	FT-34 -1	FT-43 -1	FT-46-1
1		2	2	-	-	-
2		-	-	1	-	-
3		-	-	-	1	1

4		16	16	10	14	14
5		16	16	10	14	14
6	 ST4.5*50mm	16	16	10	14	14
7	 ST4*30mm	6	6	8	10	10
8		1	1	1	1	1
9		1	1	1	1	1
10		1	1	1	1	1
11		1	1	1	1	1
12		1	1	1	1	1

Required Tools



Drill



Level




Measuring Tape




Phillips-head Screwdriver

Product Installation


(Take the FT-34-1 for example.)

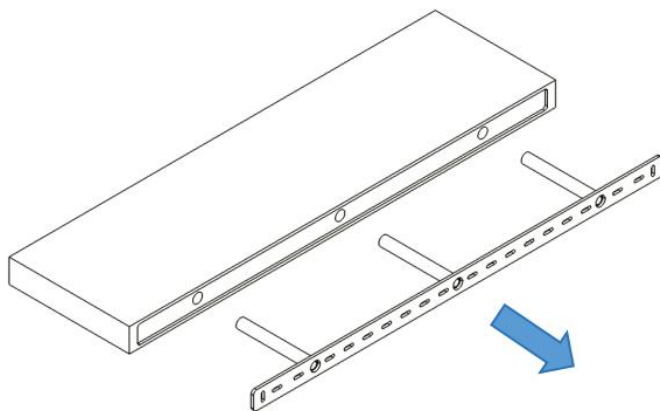


Step 1: After pairing the shelf, remove the bracket.

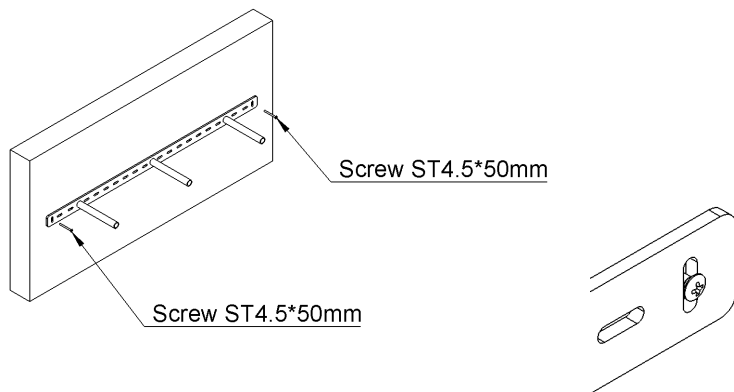

Step 2: Position the bracket preliminarily with screws.

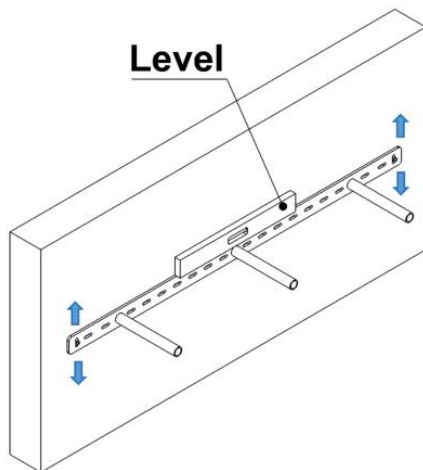

Step 3: Use a level to adjust the bracket. Tighten the screws after adjustment.

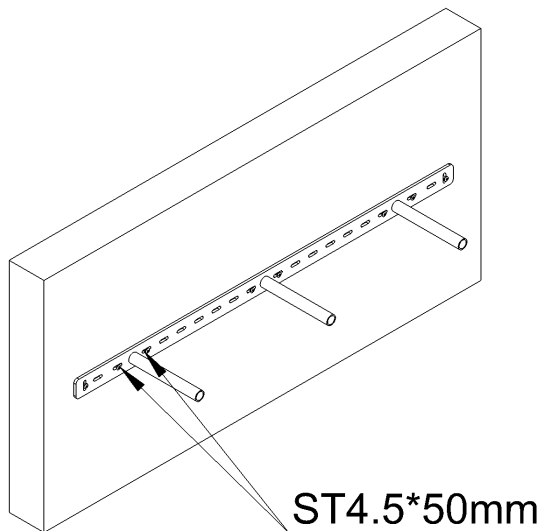


Step 4: Install remaining screws.

Note: Install the screws in the holes on both sides of the rod, and the bracket load will be better.


How to use accessories

1		For cement walls.
2		For drywall.

Using Shims With Your Bracket



If your wall is not straight, use shims to ensure your bracket is installed straight across the wall face and square to the wall. The shelf slab and bracket will properly mate only if the bracket is straight and plum.



If your bracket continues to sag after correct install, use wood shims underneath the backbar to adjust front to back level.

