



Upgrade · The Home Creator Way

GARDEN TRAILERS

MODEL:TC4268/TC4278/TC4288

VEVOR
Support Center



TC4268




TC4278



TC4288

MODEL:TC4268/TC4278/TC4288

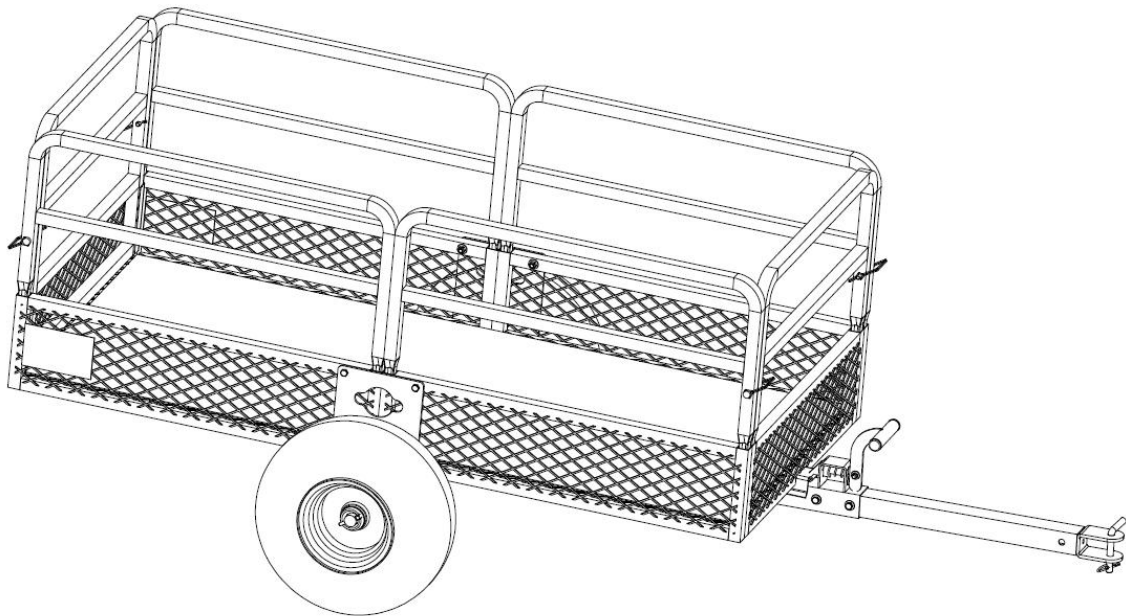

<https://youtu.be/alQyVCV19sY>

For the installation video, please scan the QR code to access.

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

SAFETY INSTRUCTIONS

WARNING:

Read this material before using this product. Failure to do so can result in serious injury.

Assembly precautions

1. Assemble only according to these instructions. Improper assembly can create hazards.
2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3. Keep the assembly area clean and well-lit.
4. Keep bystanders out of the area during assembly.
5. Do not assemble if tired or when under the influence of alcohol, drugs or medication.
6. The product capabilities apply to properly and completely assembled products only.
7. Assemble on a flat, level, hard and smooth surface capable of safely supporting the Garden Trailer.
8. For additional information regarding the parts listed in the following pages, please refer to the Assembly Diagram of this manual. Unwrap and separate all parts in a clean work area.
9. It is estimated that the installation of this product can be completed in 20 minutes by 2 person.
10. Since a large number of screws are required for assembling this product, we have provided spare screws. Therefore, there is no need to worry if you have any remaining screws after completing the product assembly.
11. The product complies with relevant standards and regulations. Installation of this device must comply with all applicable regulations, and it should only be operated in well-ventilated areas. Please read the user manual before installing and using this equipment.
12. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
13. This appliance is intended to be used in household and similar applications such as:
 - staff kitchen areas in shops, offices and other working environments;
 - farm houses;
 - by clients in hotels, motels and other residential type environments;
 - bed and breakfast type environments.
14. Please properly keep product. Check whether the product is abnormal before use. If it is abnormal, please stop using it



Use precautions







1. DO NOT SIT OR STAND ON THIS ITEM.




- 2. This product is not a toy. Do not allow children to play with or near this item.
- 3. Do not exceed specified weight capacities.
- 4. Use only on a flat, level, hard, and smooth surface that can safely support a fully loaded Garden Trailer.
- 5. Use as intended only.
- 6. Inspect before every use; do not use if parts are loose or damaged.





SAVE THIS MANUAL


PARTS LIST

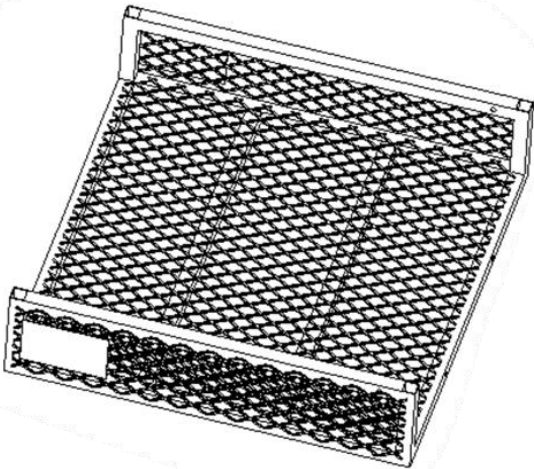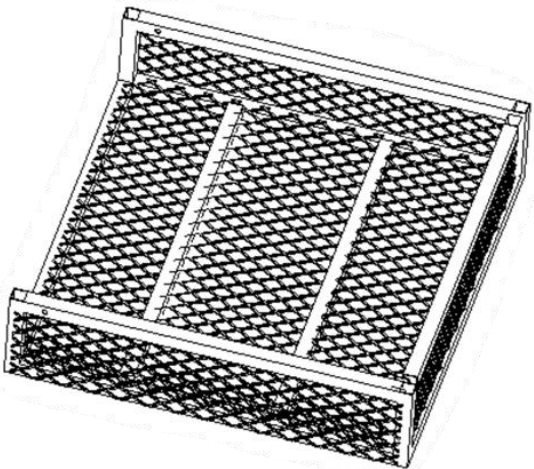N0.	Explanatory Chart	N0.	Explanatory Chart
1	 Frame A	2	 Frame B

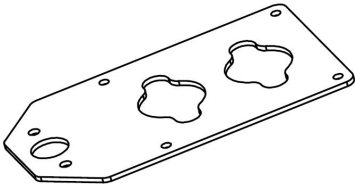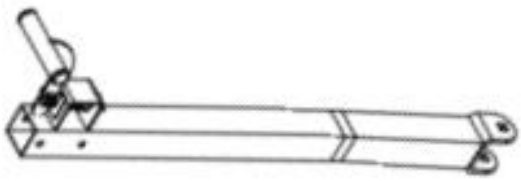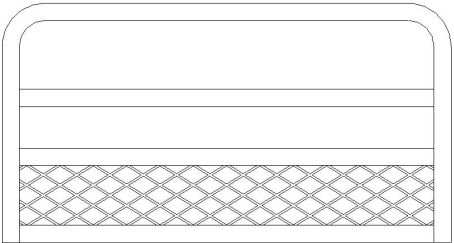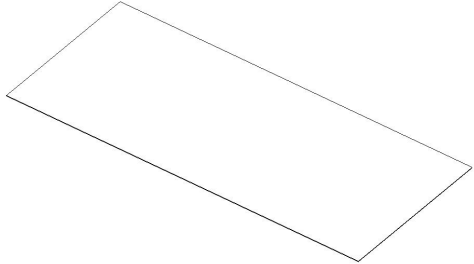3	 Fixed plate X2	4	 Axle
5	 U - shaped part	6	 Connecting rod A
7	 Connecting rod B	8	 Wheel X2
9	 Left and right guardrails X4	10	 Front guardrail
11	 Rear guardrail	12	 Plastic mat


N0.	Explanatory Chart	Quantity
A	 Screw M8*70mm	5
B	 Screw M8*45mm	8
C	 Screw M10*25mm	4

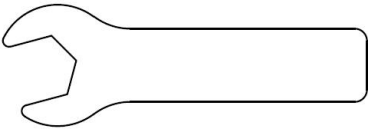D	 Washer $\varnothing 50 \times 3\text{mm}$	4
E	 Screw M12*90mm	1
F	 O - type cotter pin	2
G	 pin	1
H	 R - type cotter pin	1
I	 D - type cotter pin	4
 x2		
 x1		

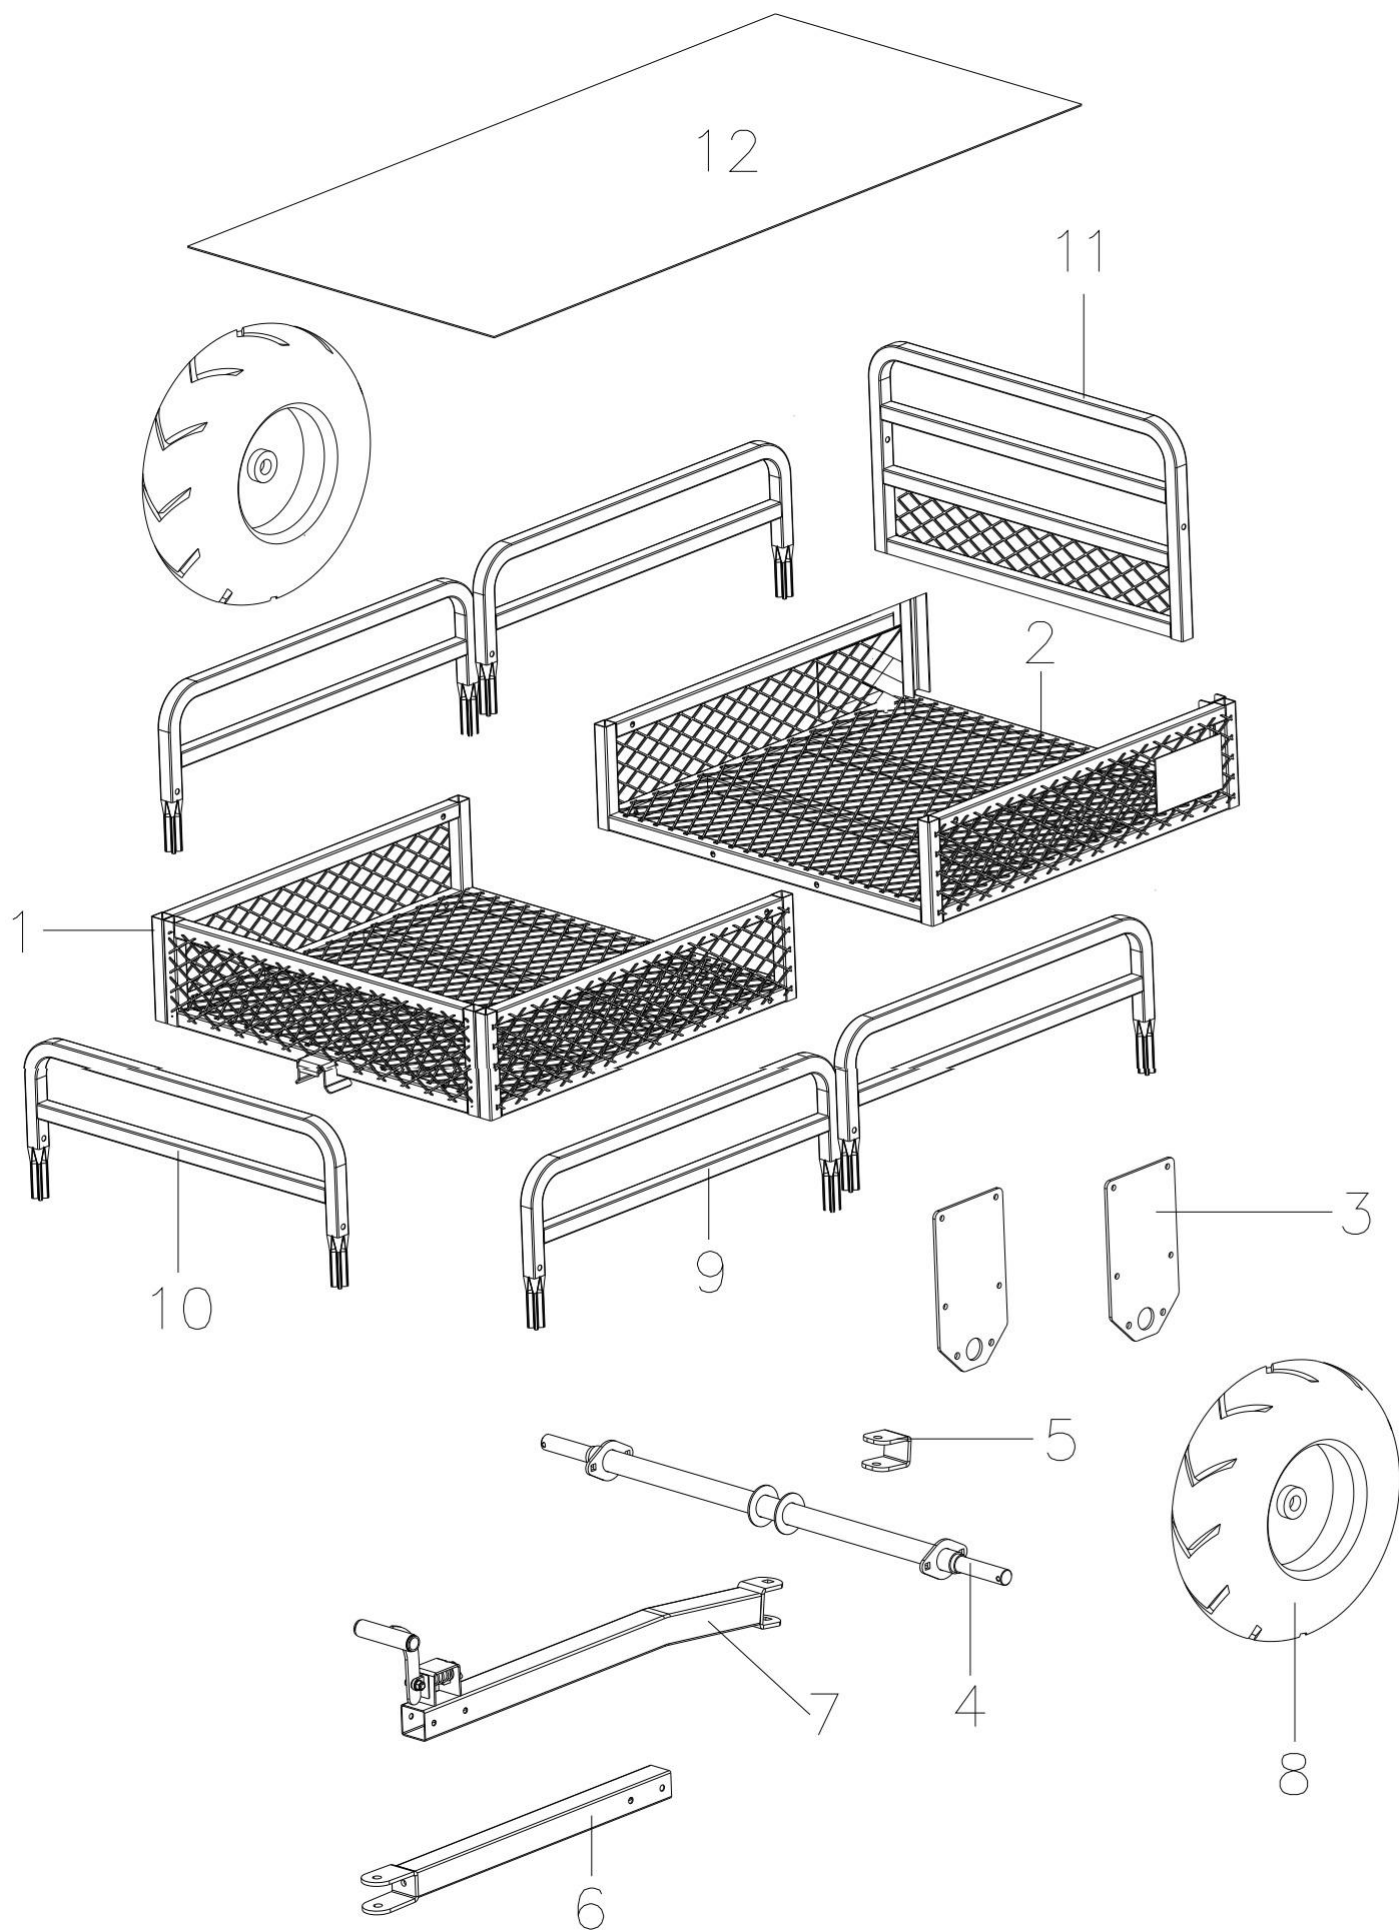


ASSEMBLY STEP


STEP 1





1 x1



2x1




A x3 Screw M8*70

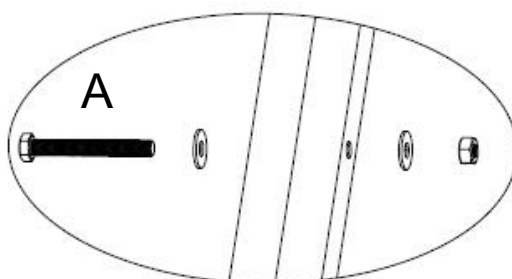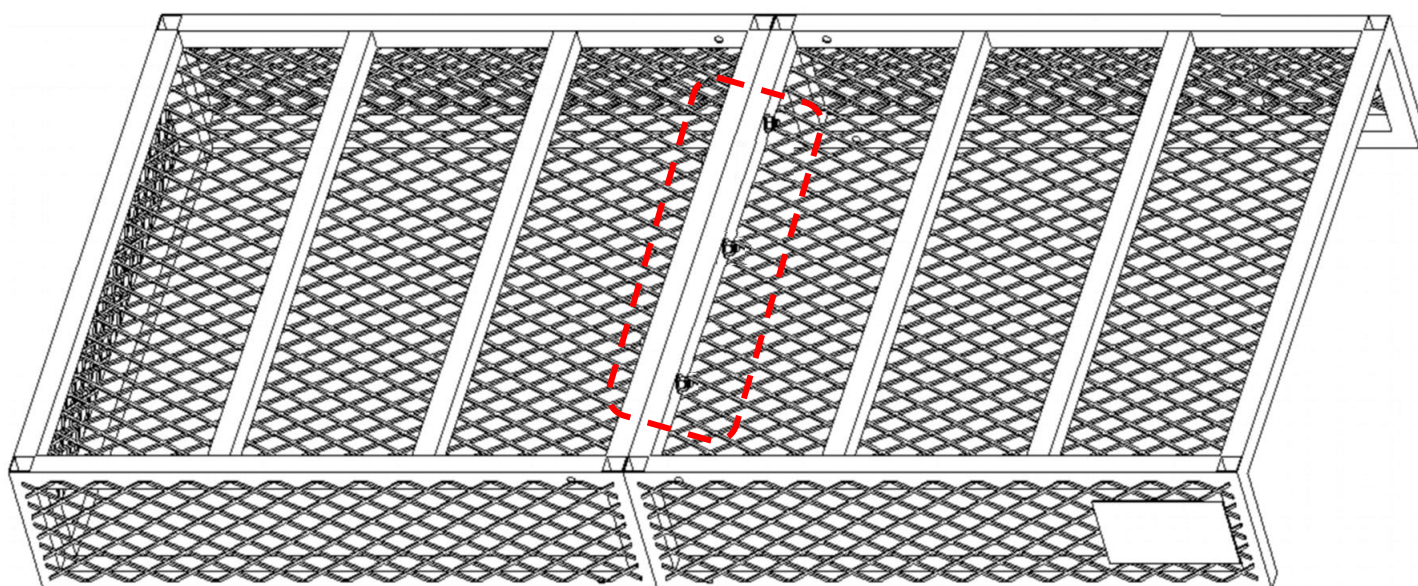


1. Align Frame A(No.1) and Frame B(No.2) in the correct positions (with the cart bed facing down).
2. When fixing the frame with screws, please note that the washers must be used in accordance with the requirements specified in the detail drawing.
3. Finally, tighten them to secure the connection.



STEP 2

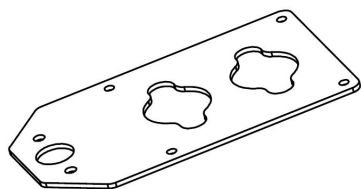

3 x1




B x4 Screw M8*45

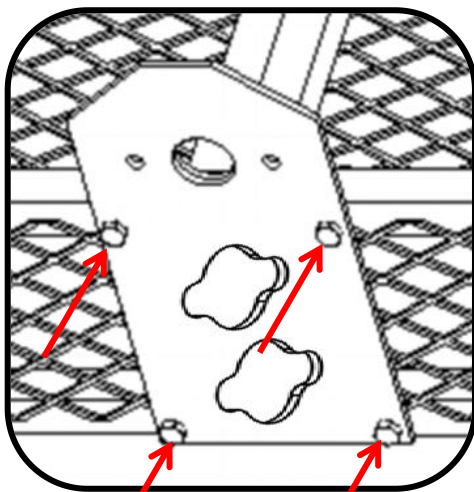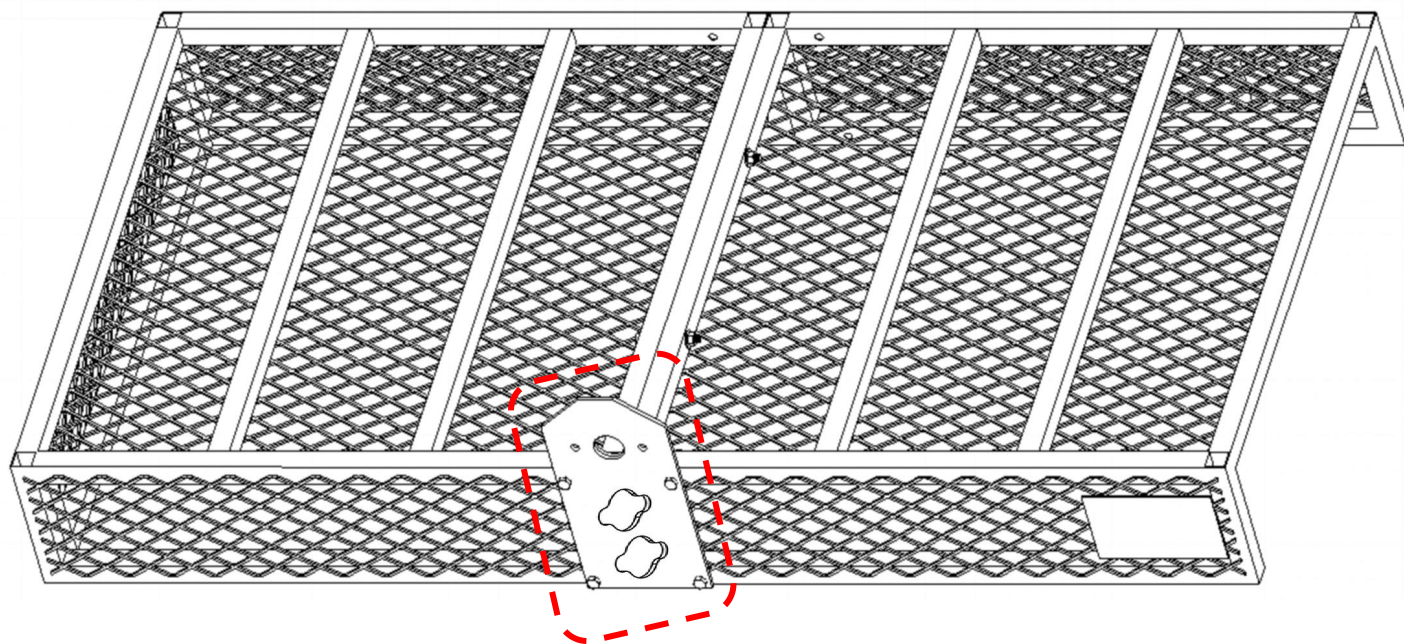


B

1. Install the Fixed plate(No.3) on the Frame.
2. At the fixing holes, insert Screw(No.B) first. Then place washer and nut in sequence for fastening.
3. Finally, tighten them to secure the connection.


STEP 3



4 x1




C x2 Screw M10*25

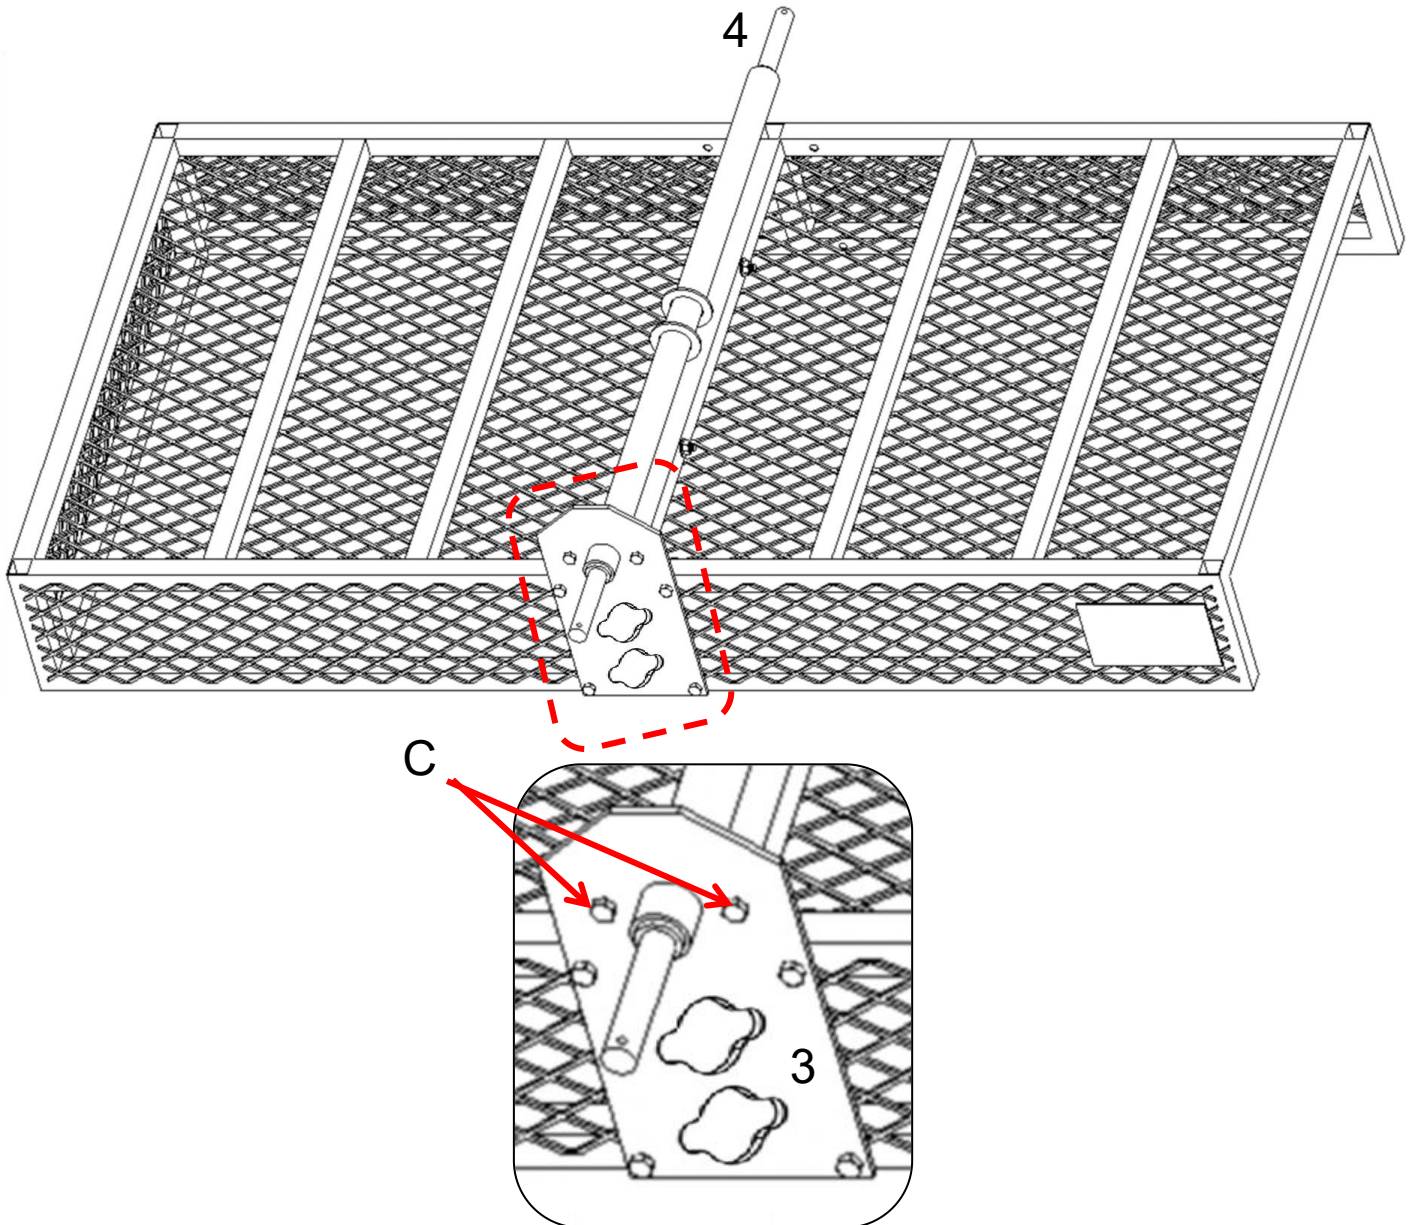


1. Insert the Axle(No.4) into the holes of the Fixed plate(No.3) .
2. Insert Screw(No.C) into the connection holes between the Axle and the Fixed plate. Then, on the other side, place washer and nut in sequence.
3. Finally, tighten them to secure the connection.


STEP 4

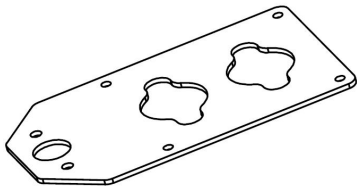



3 x1



B x4
Screw M8*45



C x2 Screw M10*25

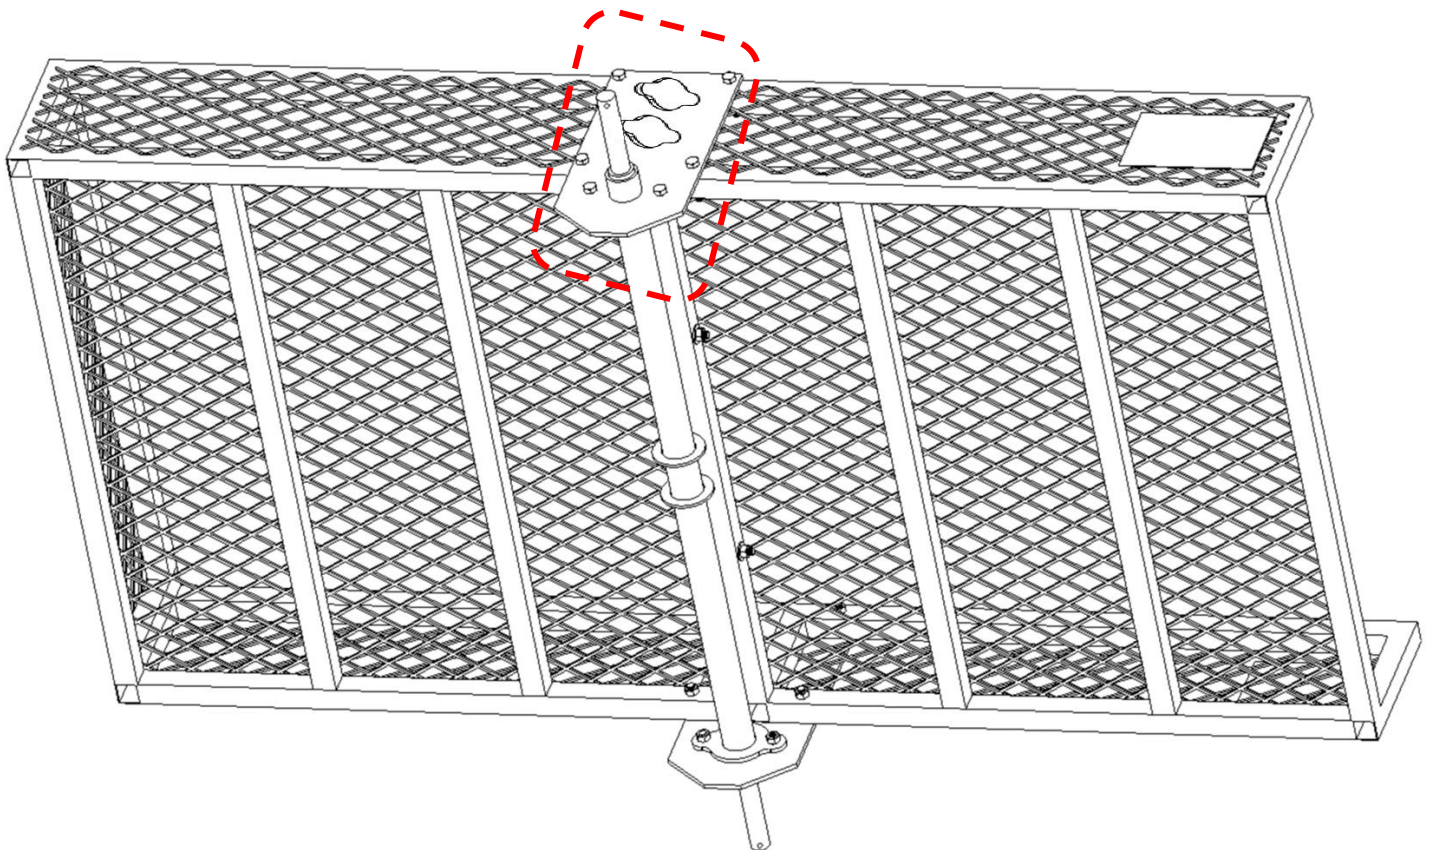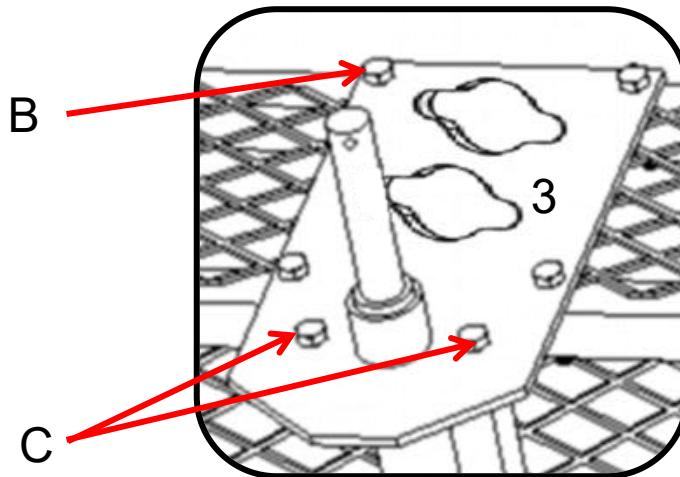


1. Insert the Axle(No.4) into the holes of the Fixed plate(No.3) .
2. Insert Screw(No.B) and Screw(No.C) into the connection holes between the Axle and the Fixed plate. Then, on the other side, place washer and nut in sequence.
3. Finally, tighten them to secure the connection.


STEP 5





E x1



5 x1

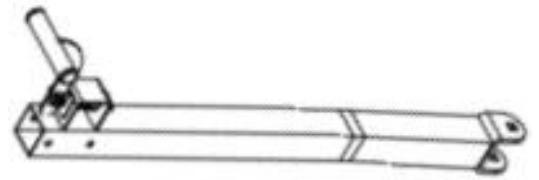


7 x1

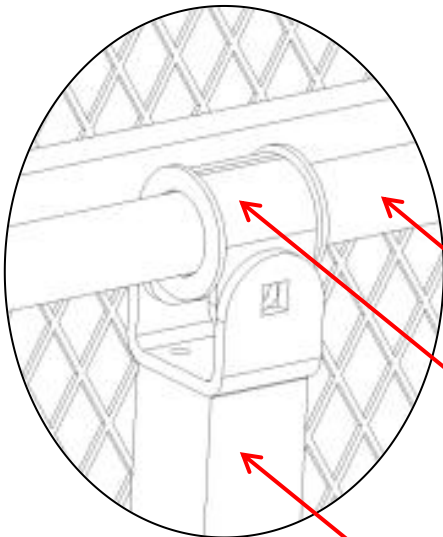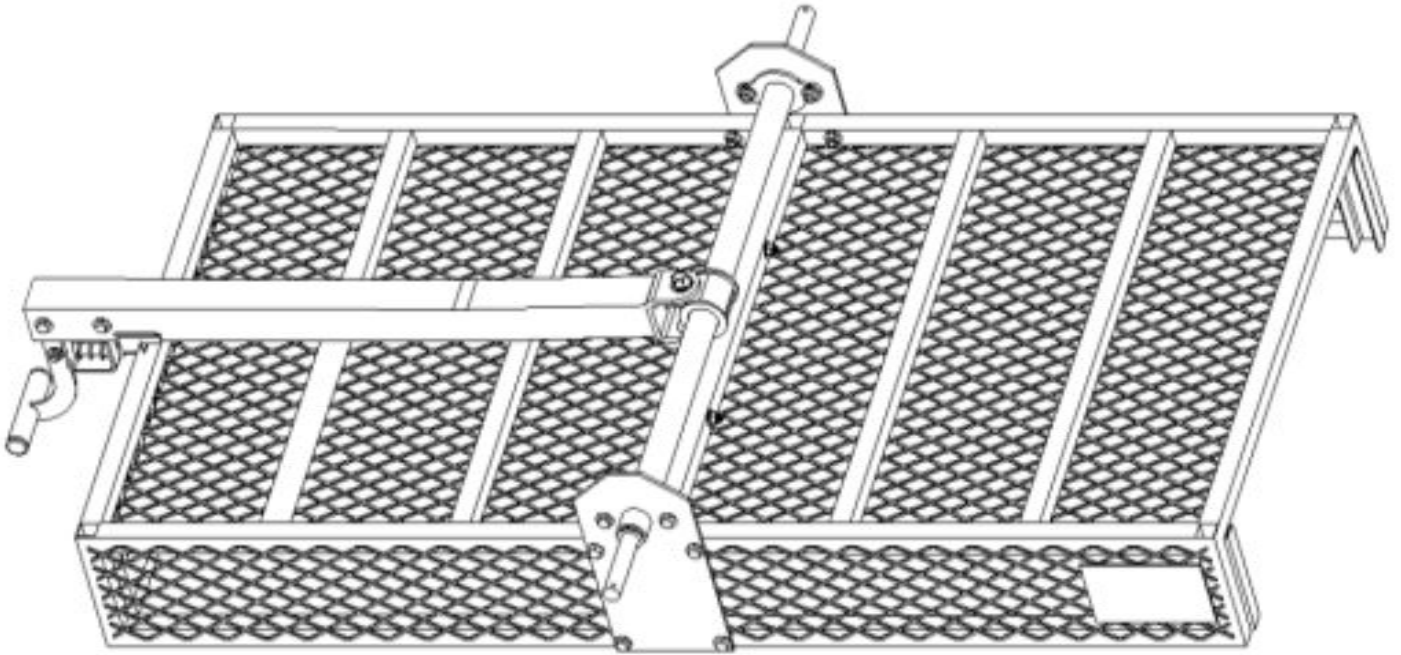

4

5

7

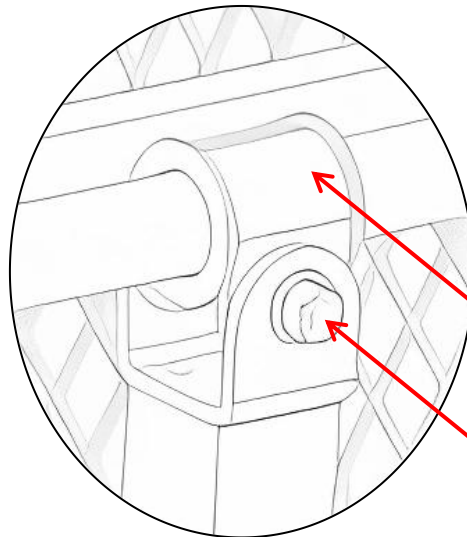


5


E

1. Place the U-shaped part(No.5) in the middle position of the axle(No.4) .
2. Align the U-shaped part(No.5) and Connecting rod B(No.7) with the installation holes.
3. Insert Screw (No.E) through the holes of the two connecting rods, and then screw on Nut.


STEP 6




A x2 Screw M8*70

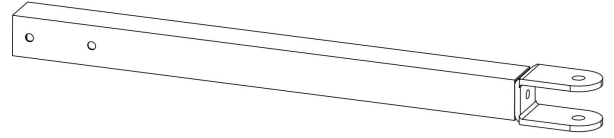


6 x1

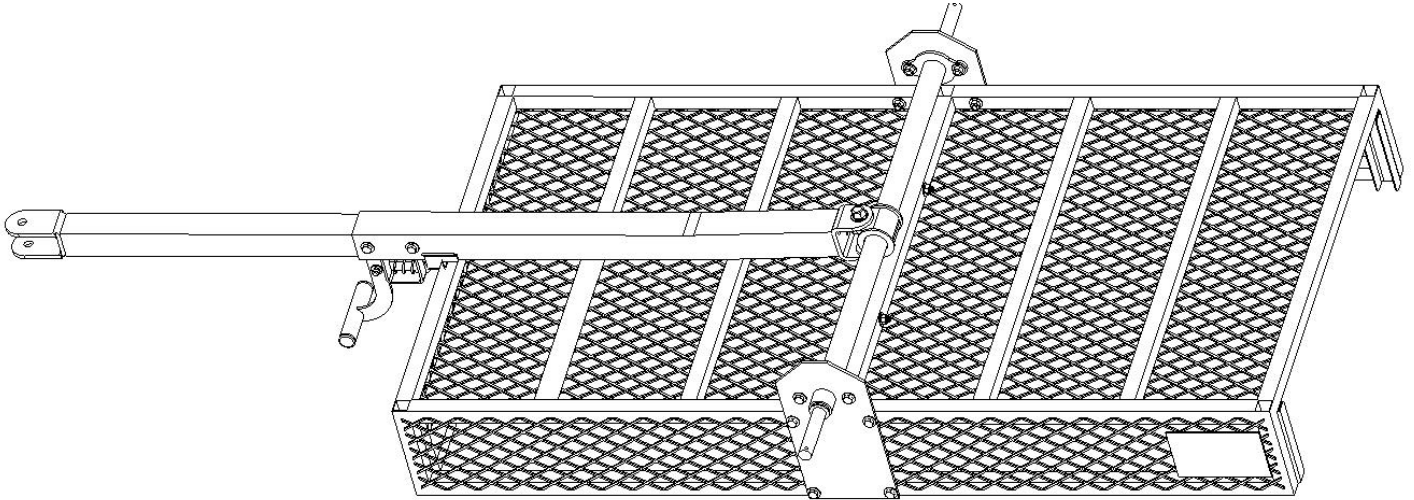

STEP-1

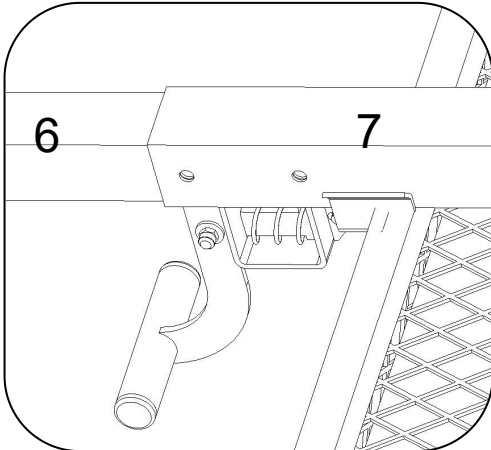


STEP-2

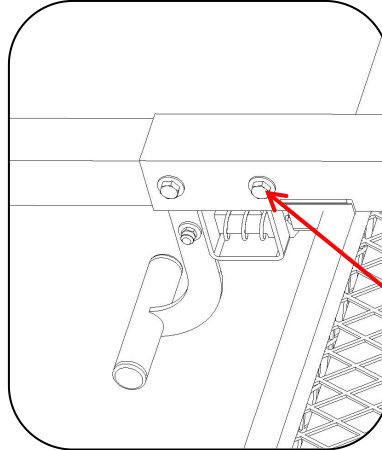

A


1. Insert Connecting rod A(No.6)and Connecting rod B(No.7) into each other.
2. Insert Screw(No.A) and place washer into the connection holes, and then place washer and nut in sequence on the other side.
3. Finally, tighten them to secure the connection.

Details

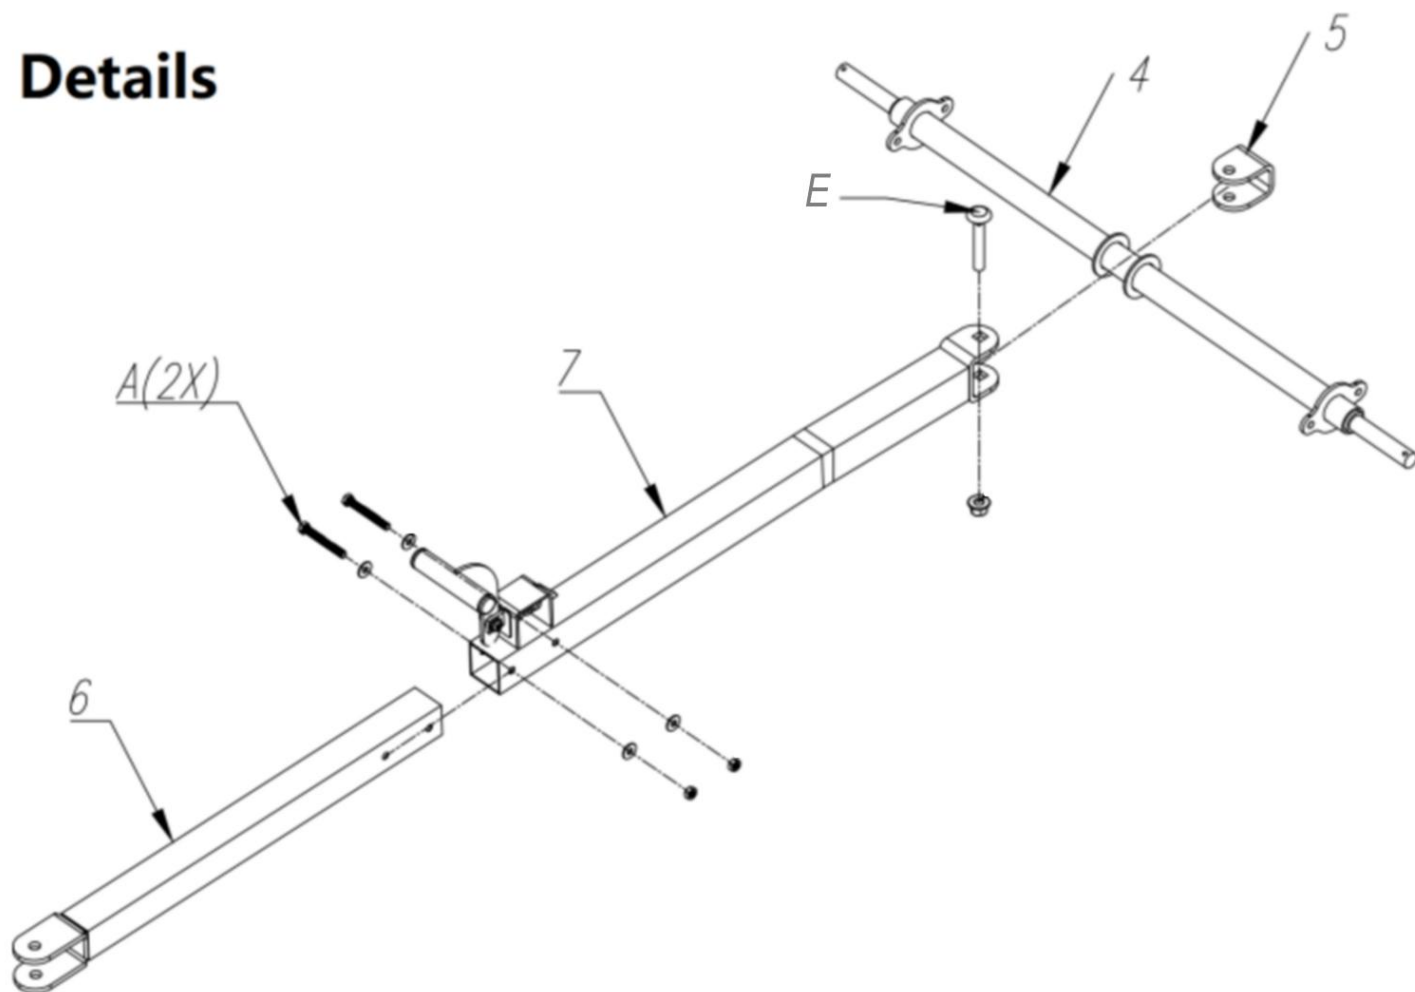


NOTE: This page shows the exploded view of parts from Step 3 to Step 6, which is convenient for you to check if the installation is correct.

STEP 7





F x2



D x4




8 x2

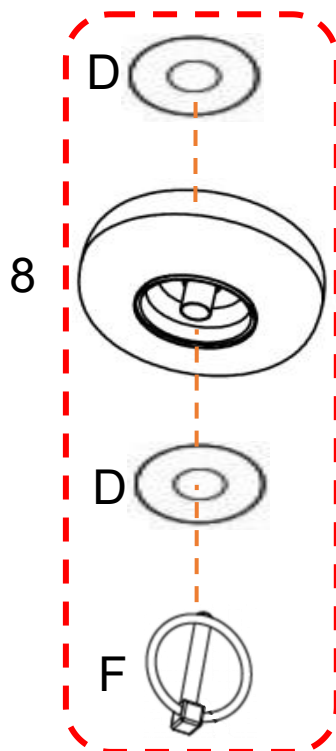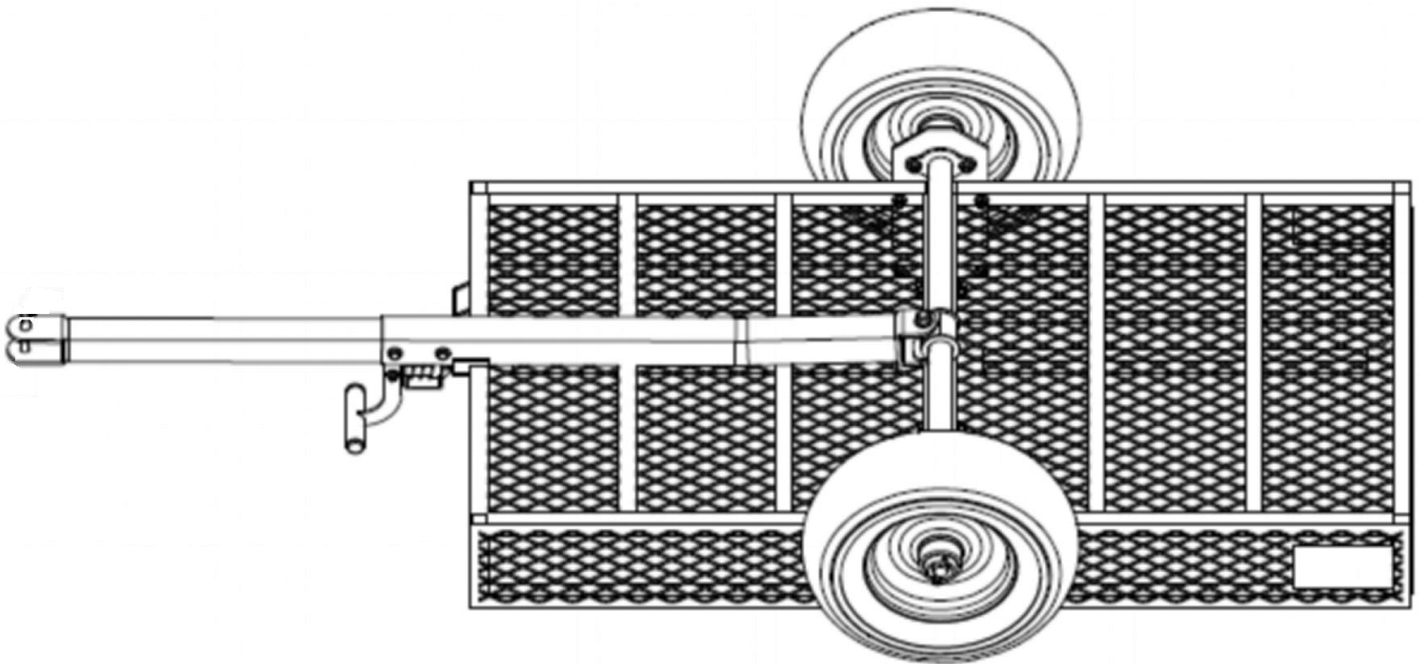

1. First, put Washer(No.D) on the mounting shaft of the Wheel, and then install the Wheel(No.8) in the designated position.
2. Put Washer(No.D) on first, and then insert the O-type cotter pin(No.F) into the corresponding hole on the mounting shaft.
3. Note: The inflation port should face outwards.


STEP 8

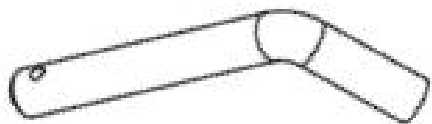

G x1






H x1

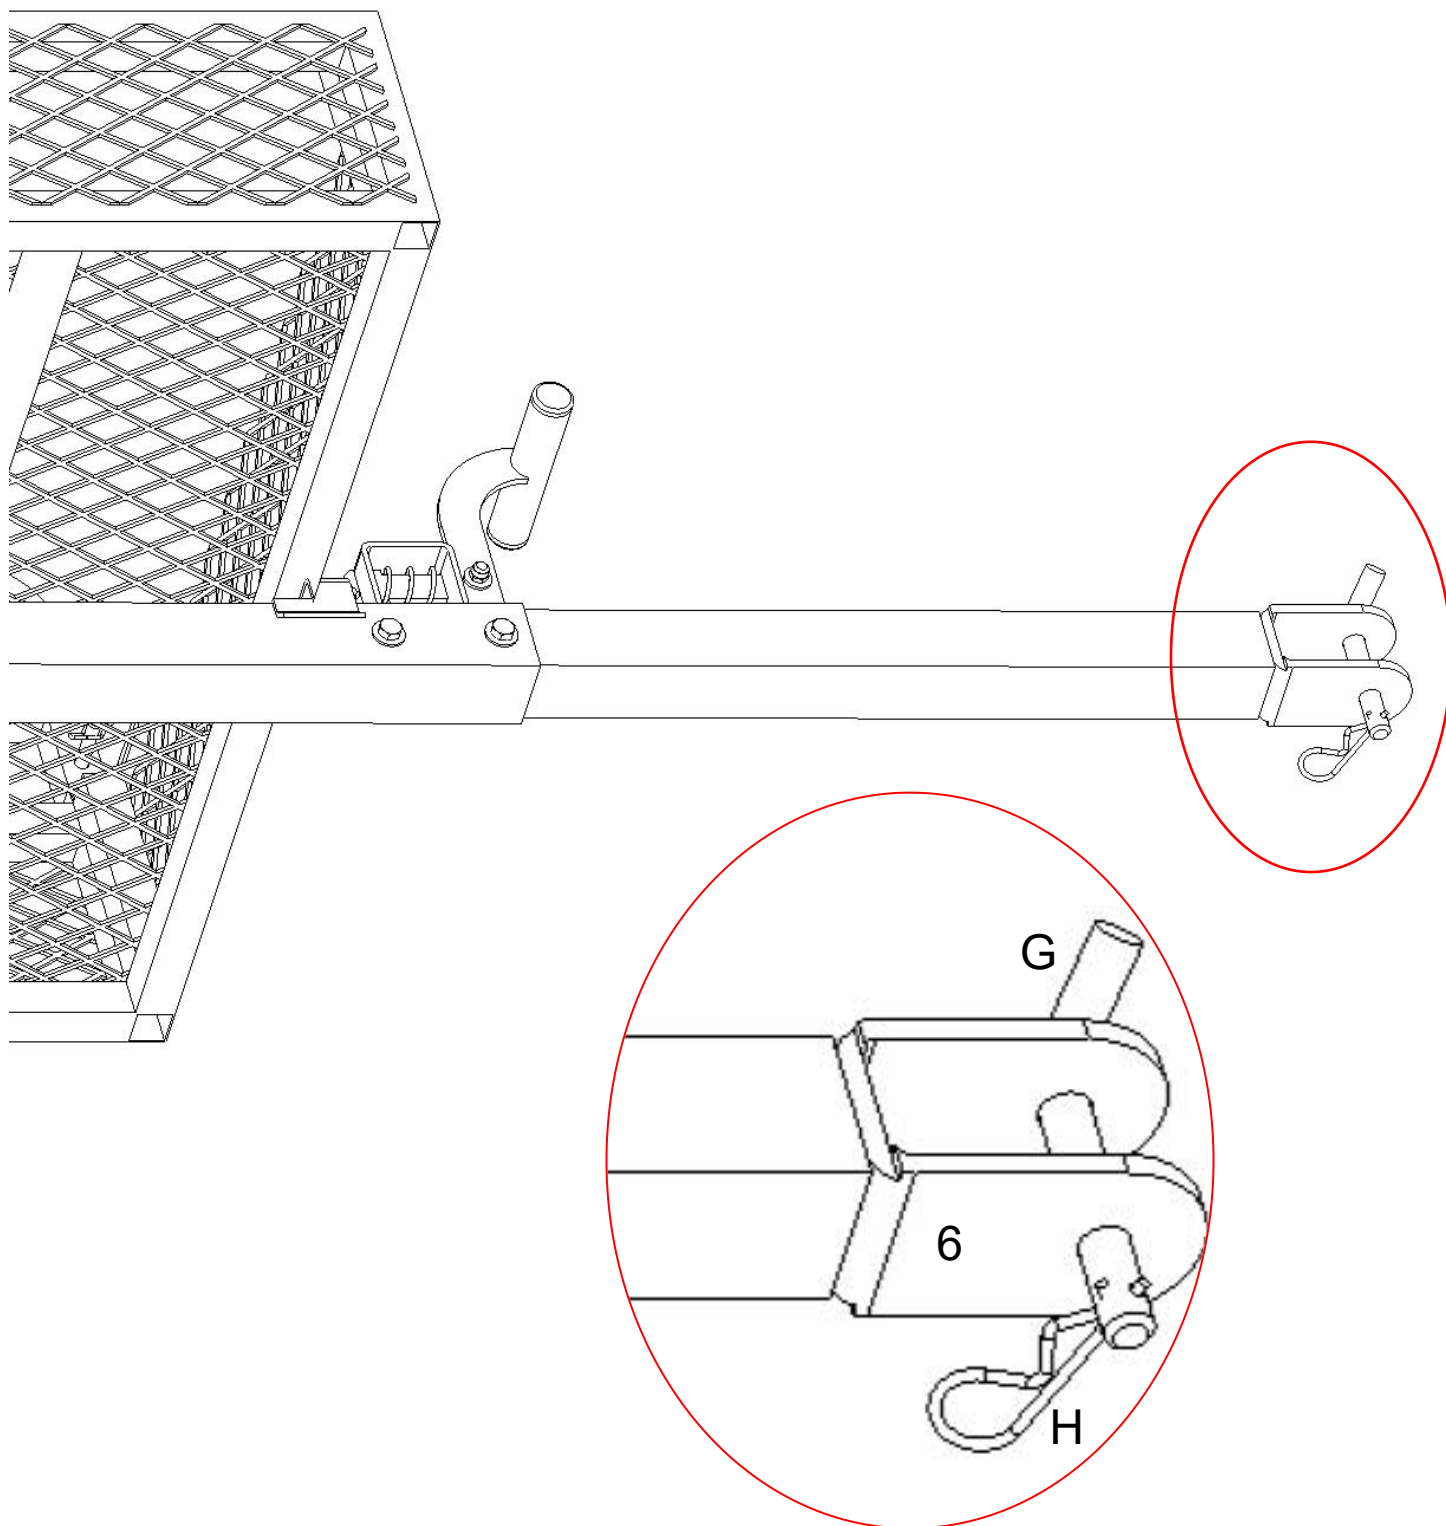





1. Insert the pin(No.G) into Connecting rod A(No.6).
2. Insert the R-type cotter pin(No.H) into the hole of the pin(No.G).

STEP 9

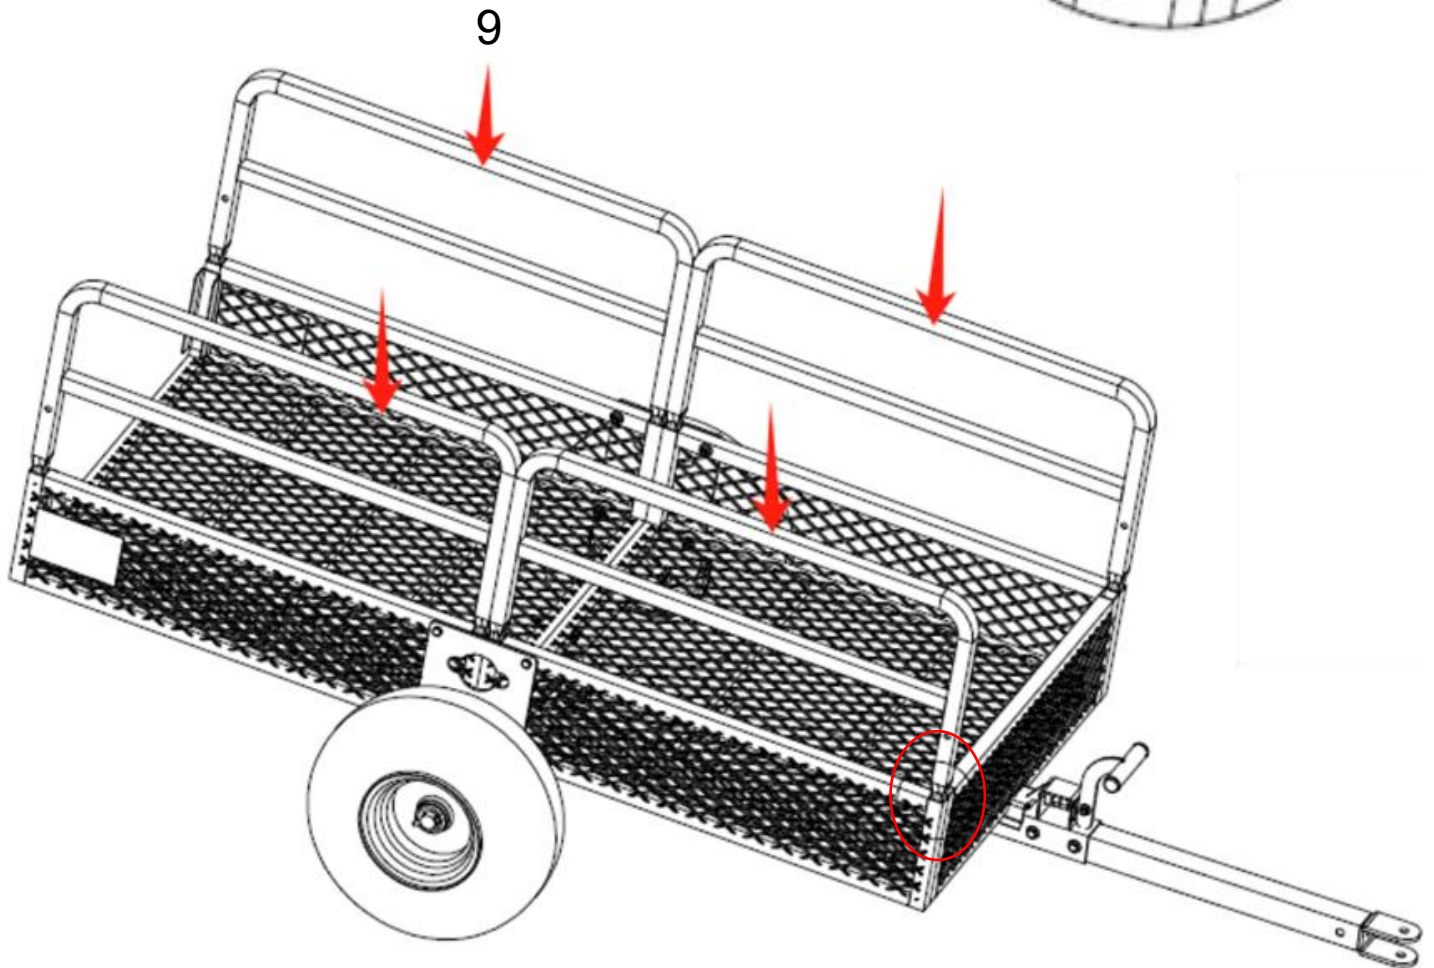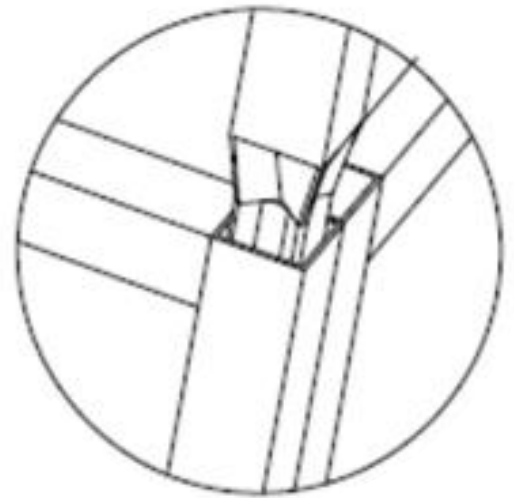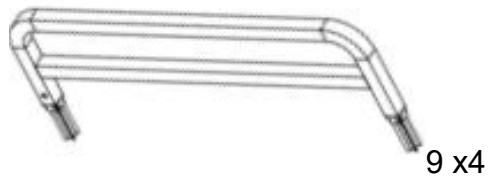

Install the 4 Left and right guardrails(No.9) on the left and right sides of the frame.

STEP 10

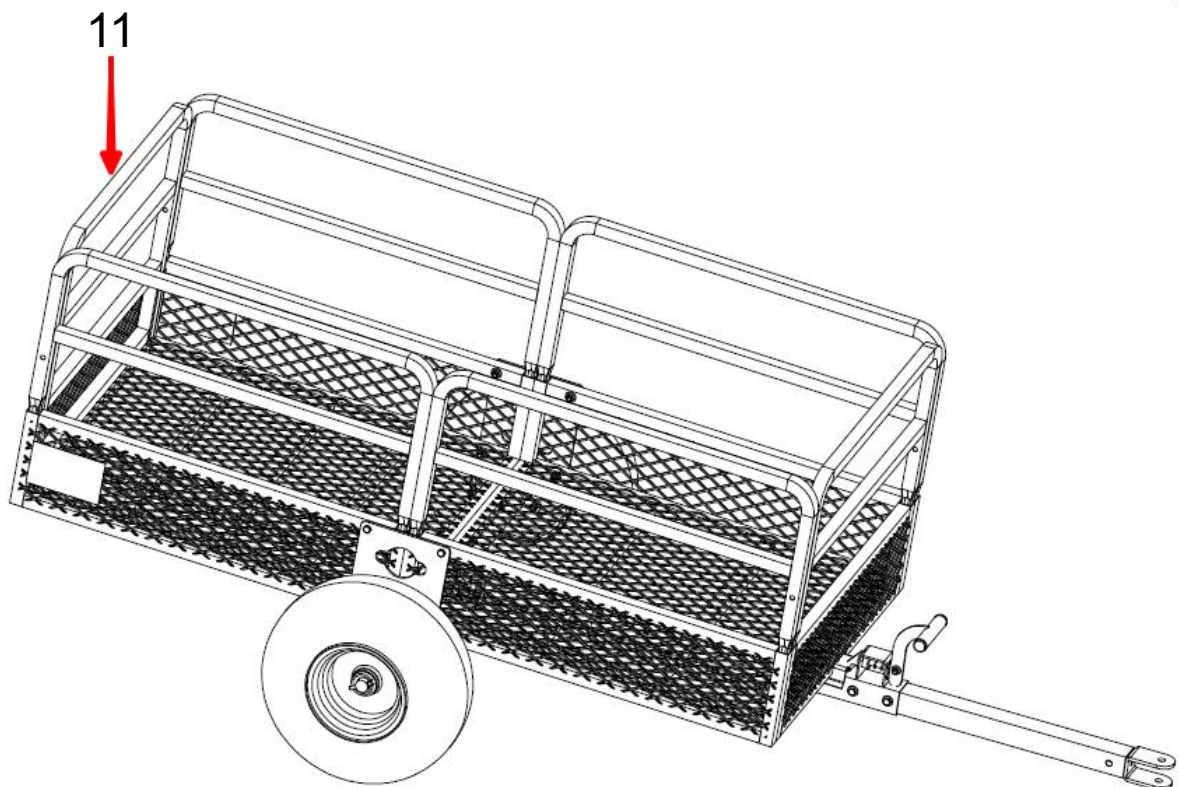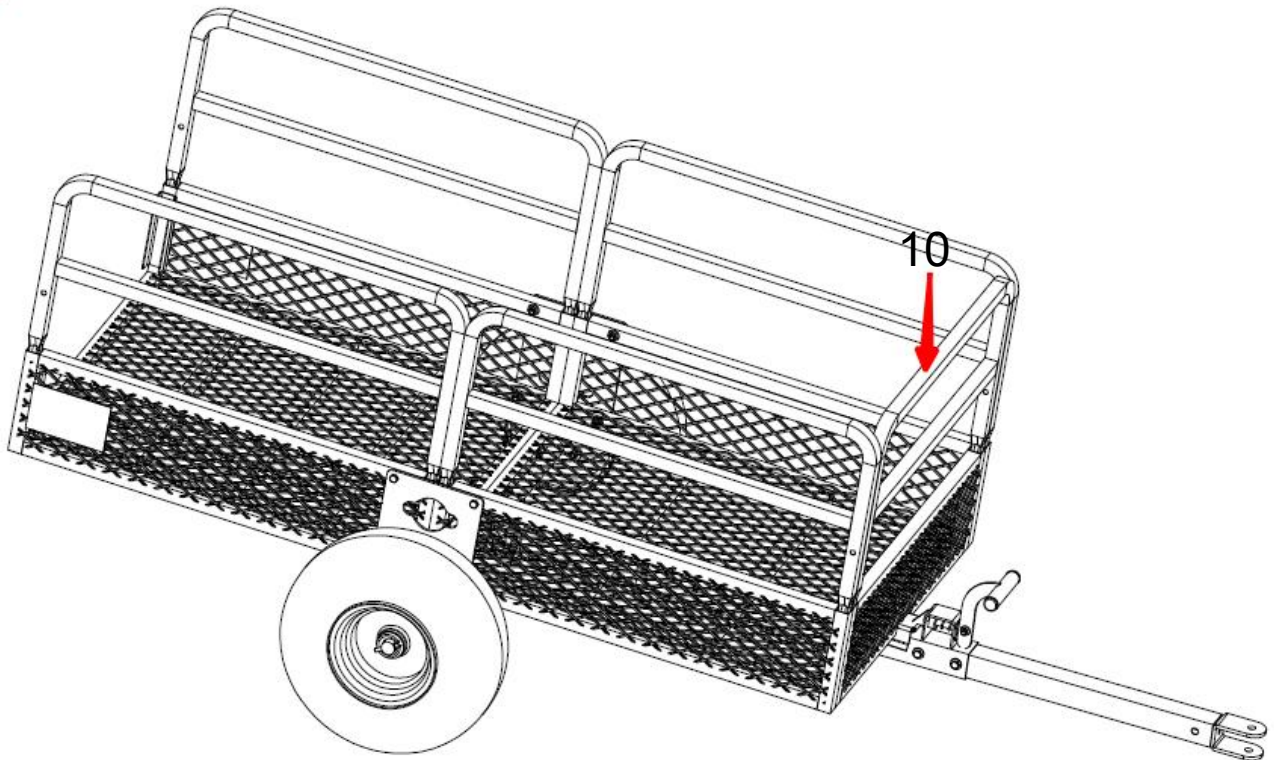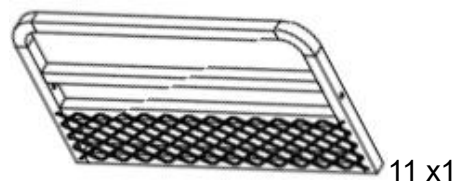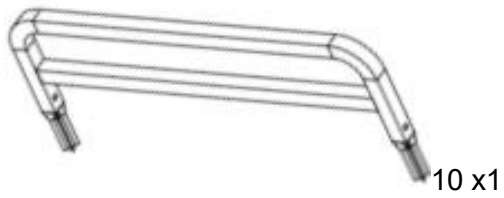


1. Install the Front guardrail (No. 10) on the left and right sides of the frame.
2. Install the Rear guardrail (No. 11) on the left and right sides of the frame.


STEP 11




1 x4

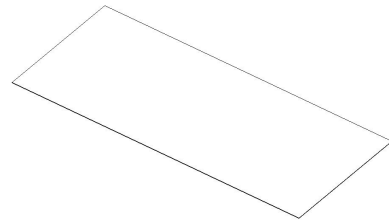

12 x1

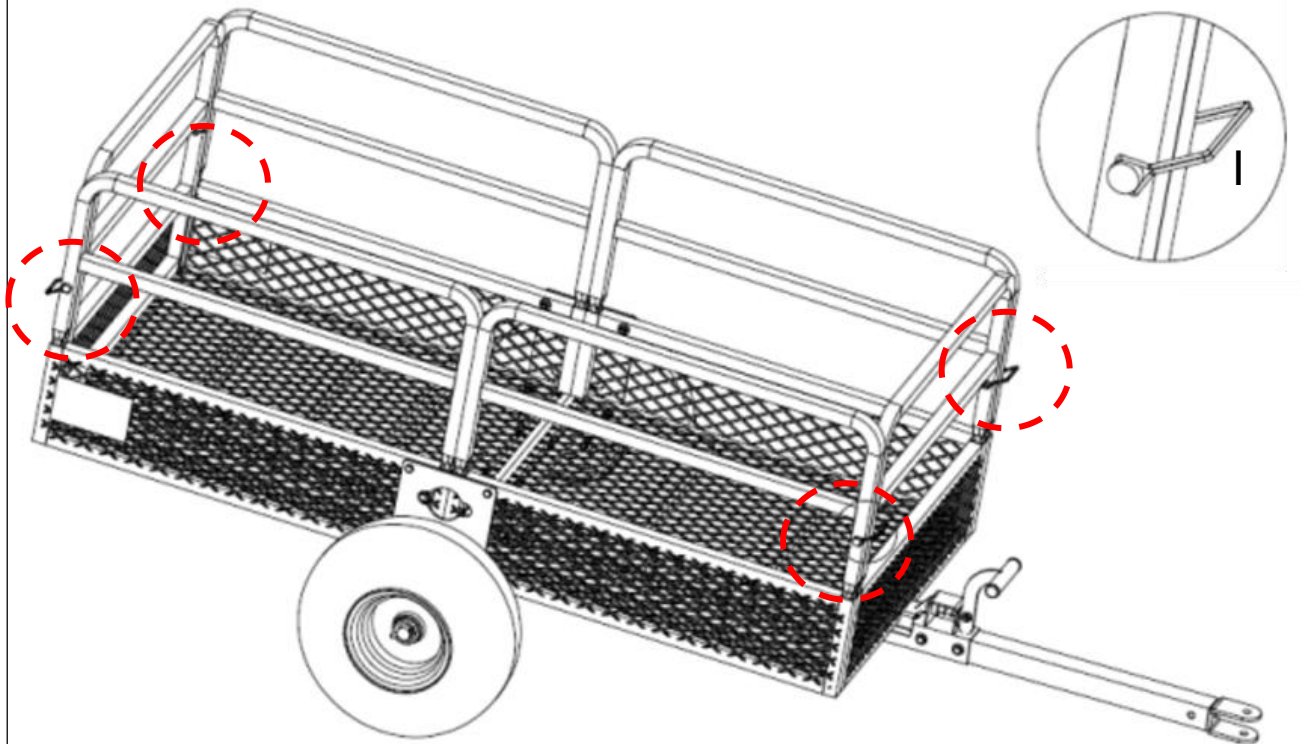

Fix all the guardrails at the four corners with D-type cotter pins(No.1).

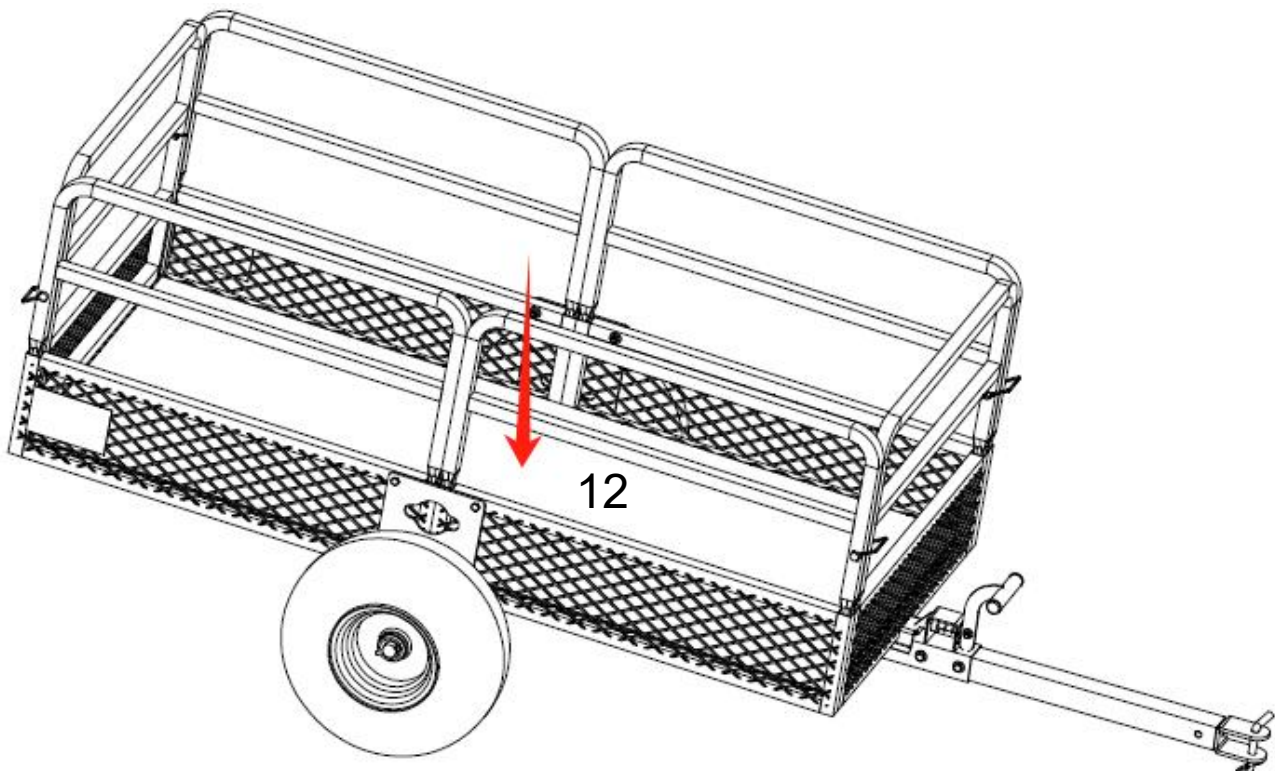

Lay the Plastic mat(No.12) flat inside the cart bed.

PRODUCT PARAMETER

Model	TC4268
Volume	15 cu.ft
Carriage size	1370*710*395mm / 54*28*15.5inches
Maximum loading capacity	1500 LBS

Model	TC4278
Volume	22 cu.ft
Carriage size	1490*735*575mm / 58.6*28.9*22.6inches
Maximum loading capacity	1600 LBS

Model	TC4288
Volume	28 cu.ft
Carriage size	1524*810*635mm / 60*32*25inches
Maximum loading capacity	1765 LBS

