



Upgrade · The Home Creator Way

Geometric Climber Play


MODEL:JX-DC-06E

VEVOR Support Center



JX-DC-06E

MODEL:JX-DC-06E

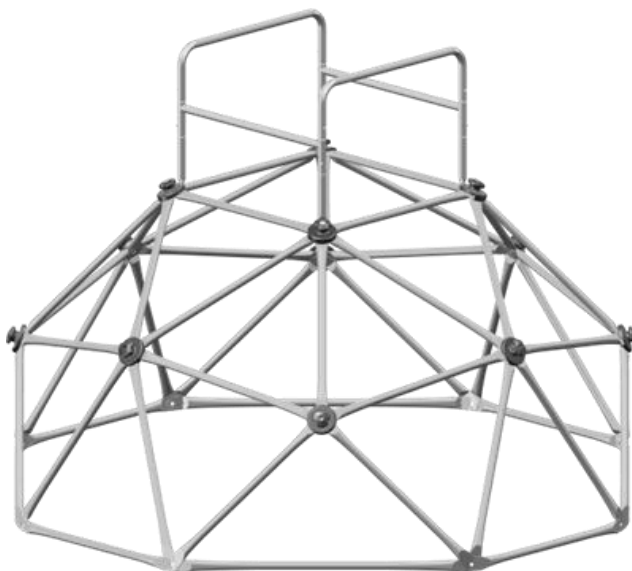

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

INSTRUCTIONS

Thank you very much for choosing this Geometric Climber Play.

Please read all of the instructions before using it. The information will help you Achieve the best possible results.

The products carried in this catalog may be different in color than the actual item.

1. Safety Instructions

FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

Owner must ensure that all players know and follow these rules for safe operation Of the system.

To ensure safety, do not attempt to assemble this product without following the Instructions carefully.

Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential for proper operation and to reduce the risk of accident or injury. A high probability of serious injury exists if this product is not installed, maintained and operated properly.

- If using a ladder during assembly, use extreme caution.
- Two capable adults are recommended for this operation.
- Be aware that parts can be damaged by over tightening the screws.
- Wear safety glasses throughout the assembly.

Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.

BEFORE BEGINNING ASSEMBLY

Keep the hardware bags and their contents separate.

Identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document. Test fit all Bolts by inserting them into their

respective holes. Do not scrape away all of the powder coating. Bare metal may rust. You may need to pound some Bolts into place with a hammer or mallet.

Two adults required to complete assembly

Only adults should set up the product. Do not allow children in the setup area until assembly is complete.

INSTALLATION & GROUND PREPARATION INSTRUCTIONS:

- Provide enough room so that children can use the equipment safely. For example, for structures with multiple play activities, a slide should not exit in front of a swing.
- Separate active and quiet activities from each other. For example, locate sandboxes away from swings or use a guardrail or barrier to separate the sandbox from the movement of the swings.
- Do not install home playground equipment over concrete, asphalt, packed earth, grass, carpet, or any other hard surface. A fall onto a hard surface can result in serious injury to the equipment user.
- To prevent serious injury, warn children that they must not use the equipment until properly installed.
- Create a site free of obstacles that could cause injuries – such as low overhanging tree branches, overhead wires, tree stumps and/or roots, large rocks, bricks, and concrete.
- Choose a level location for the equipment. This can reduce the likelihood of the play set tipping over and loose-fill surfacing materials washing away during heavy rains.

PLAYGROUND AND SURFACE MATERIALS INSTRUCTIONS

- Use containment, such as digging out around the perimeter and/or lining the perimeter with landscape edging.
- Do not install loose fill surfacing over hard surfaces such as concrete or asphalt.
- Installation of rubber tiles or poured-in-place surfaces (other than loose fill materials) generally requires a professional and are not “do-it-yourself” projects.
- Use playground surfacing materials (other than loose fill material) that comply to the safety standard ASTM F1292 Standard Specification for Impact Attenuation of Surfacing Materials within the Use Zone of Playground Equipment.

OPERATING INSTRUCTIONS

Observing the following instructions and warnings reduces the likelihood of serious or fatal injury:

- On-site adult supervision should be provided for children of all ages.
- Instruct children not to use the equipment in a manner other than intended.
- To prevent entanglement and strangulation, dress children appropriately, using well-fitting shoes and avoiding ponchos, scarves, jackets with neck drawstrings, helmets with straps, and other loose-fitting clothing that is potentially hazardous while using equipment.
- Instruct children not to play when the equipment is wet.
- Instruct children not to attach items to the playground equipment that are not specifically designed for use with the equipment, such as, but not limited to, jump ropes, clotheslines, pet leashes, cables and chains, as they may cause a strangulation hazard. Do not move the equipment while in use.
- Impact surfacing needs to cover the entire recommended play area.

CONSUMER INFORMATION SHEET FOR PLAYGROUND SURFACING MATERIALS

Select Protective Surfacing:

One of the most important things you can do to reduce the likelihood of serious head injuries is to install shock-absorbing protective surfacing under and around your play equipment. The protective surfacing should be applied to a depth that is suitable for the equipment height in accordance with ASTM Specification F1292. There are different types of surfacing to choose from; whichever product you select, follow these guidelines:

NOTE: Do not install home playground equipment over concrete, asphalt, or any other hard surface. A fall onto a hard surface can result in serious injury to the equipment user. Grass and dirt are not considered protective surfacing because wear and environmental factors can reduce their shock-absorbing effectiveness. Carpeting and thin mats are generally not adequate protective surfacing. Ground level equipment – such as a sandbox, activity wall, playhouse or other equipment that has no elevated play surface – does not need any protective surfacing. Loose Fill Materials: Maintain a minimum depth of 9 inches (23 cm) of

loose fill materials such as wood mulch/chips, engineered wood fiber (EWF), or shredded/recycled rubber mulch for equipment up to 8 feet (244 cm) high; and 9 inches (23 cm) of sand or pea gravel for equipment up to 5 feet (152 cm) high.

NOTE: An initial fill level of 12 inches (30 cm) will compress to about a 9-inch (23 cm) depth of surfacing over time. The surfacing will also compact, displace, and settle, and should be periodically refilled to maintain at least a 9-inch (23 cm) depth. Use a minimum of 6 inches (15 cm) of protective surfacing for play equipment less than 4 feet (122 cm) in height. If maintained properly, this should be adequate. (At depths less than 6 inches (15 cm), the protective material is too easily displaced or compacted.) Use containment, such as digging out around the perimeter and/or lining the perimeter with landscape edging. Don't forget to account for water drainage. Check and maintain the depth of the loose fill surfacing material. To maintain the right amount of loose fill materials, mark the correct level on play equipment support posts. That way you can easily see when to replenish and/or redistribute the surfacing. Do not install loose fill surfacing over hard surfaces such as concrete or asphalt.

Poured-In-Place surfaces or Premanufactured Rubber Tiles—You may be interested in using surfacing other than loose fill materials – like rubber tiles or poured-in-place surfaces. Installation of these surfaces generally requires a professional and is not a “do-it-yourself” project. Review surface specifications before purchasing this type of surfacing. Ask the installer/manufacture for a report showing that the product has been tested to the following safety standard: ASTM F1292 Standard Specification for Impact Attenuation of Surfacing Materials within the Use Zone of Playground Equipment.

This report should show the specific height for which the surface is intended to protect against serious head injury. This height should be equal to or greater than the fall height – vertical distance between a designated play surface (elevated surface for standing, sitting, or climbing) and the protective surfacing below – of your play equipment. Check the protective surfacing frequently for wear. Placements—Proper placement and maintenance of protective surfacing is essential.

The protective surfacing must extend at least 2 m (6.6 feet) in all directions beyond

the limits of the device.

SAFE PLAY AREA


SAFETY ZONE - Place the equipment no less than 6.6 ft. (2 m) from any structure or obstruction such as a fence, garage, house, overhanging branches, laundry lines, or electrical wires. The impact surfacing needs to cover the entire recommended play area. Refer to the example below.

Play set dimensions:

6' (1.83 m) x 6' (1.83 m)

Recommended play area:

12' 6" (3.83 m) x 12' 6" (3.83 m)

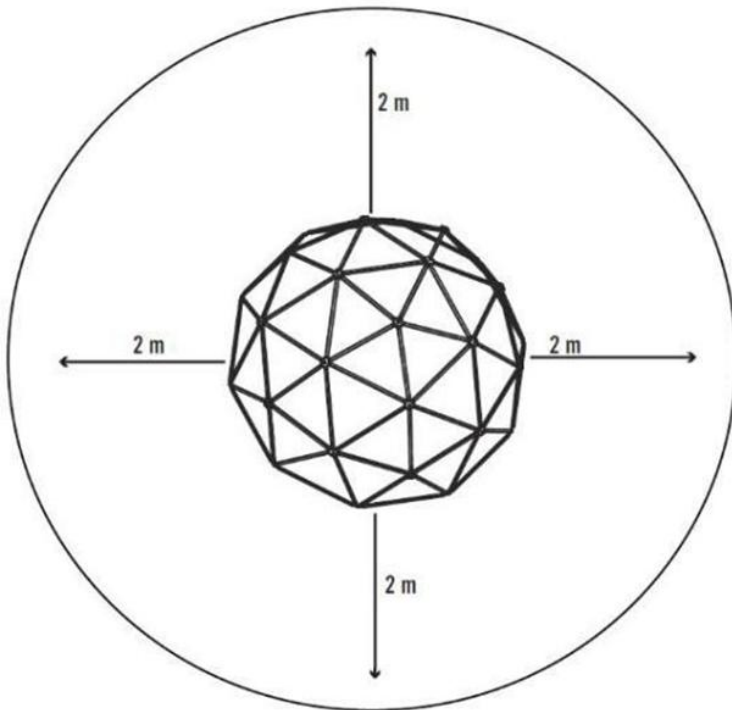

2. Intended use

- The article is only suitable for recreational use by people aged 3 and over.
- The article is not suitable for use on public playgrounds.
- The article is not suitable for children under 3 years!

3. Symbols



Read the operating instructions carefully!



The article is not suitable for children under 3 years!

MODEL AND PARAMETERS

Model	JX-DC-06
Weight Capacity	600 lbs (270 kg)
Ages	3-10
Number	4-5kids
Assembled Dimensions	6FT.W x 3FT.H

PART LIST

 A.Long Tube x 4	 B.Short Tube x 20	 L.Medium Tube x24	 C.Black Grip x 12
 E.Long Bolt x 12	 F.Short Bolt x 8	 G.Thin Nut x 12	 H.Normal Washer x 28
 I.Allen Wrench x 2	 J.Double Open-end Wrench x 1	 K.Lock Nut x 8	 D.Long Nut x 12
 M.Supporting Tube x 4	 N.Type H Tube x 2	 O.Type U Tube x 2	


Tips: Part A and B has the same color, they can be identified by its length.

ASSEMBLY INSTRUCTION

Dome Climber Assembly

Step 1: Bottom Circle Assembly


First, Lay out 4 Long Tubes (A) and 4 Short Tubes (B) in the order illustrated Below.

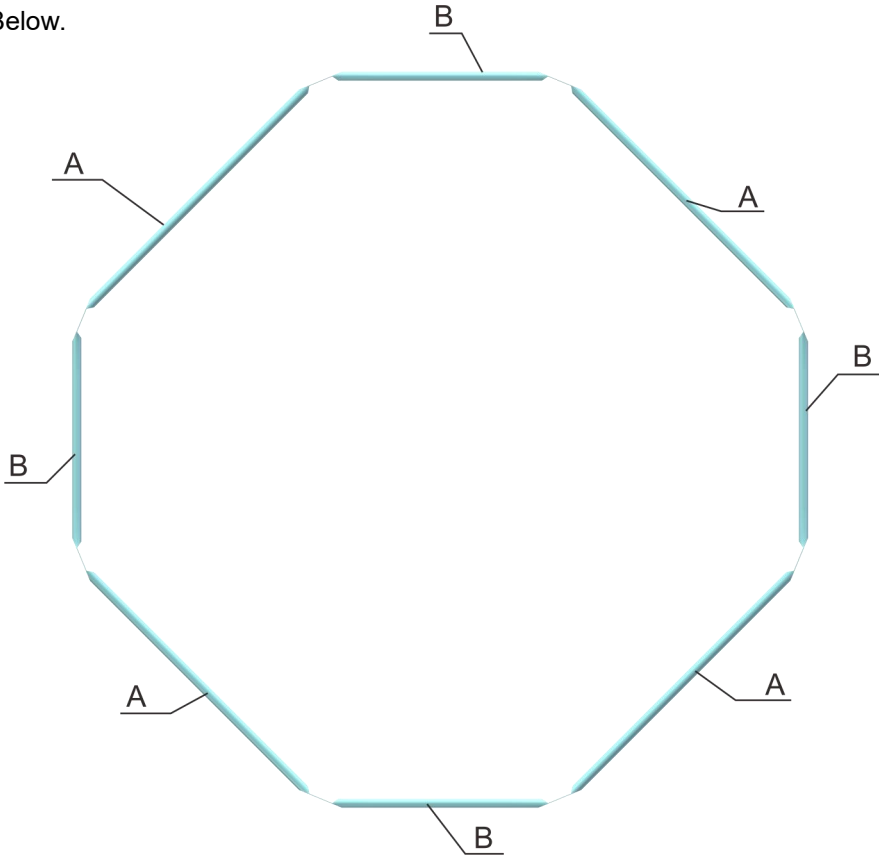


Second, pick up 1 short pole (B) and 1 medium pole (L), then connect them to one of the joints of the octagon with a short bolt (F), a lock nut (K) and two normal washers (H).

Tips: The order of the poles needs to be the same as the order marked in the following picture.

The outermost pole is pole ①, the second is pole ②, the third is pole ③, and the final one (also the innermost) is pole ④.

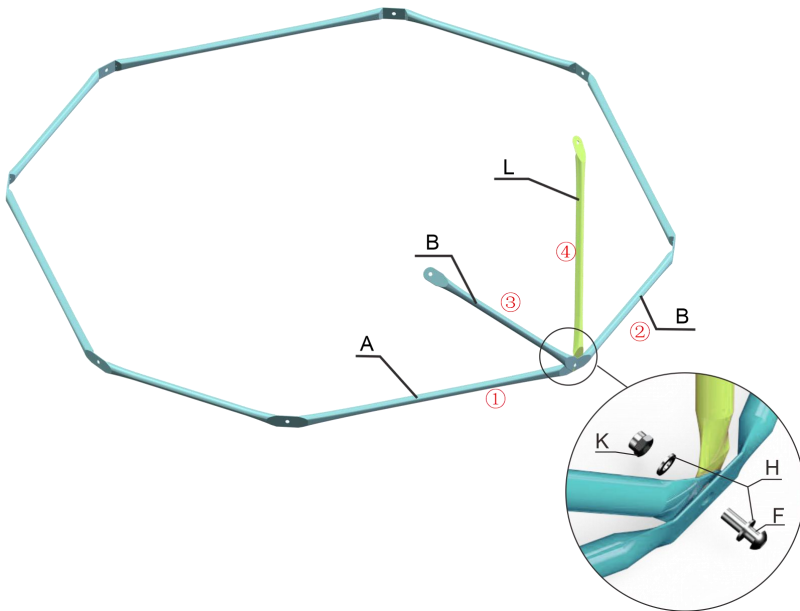

Third, repeat the operation at the second step, and you will get the following shape. Now, the bottom circle has been finished.

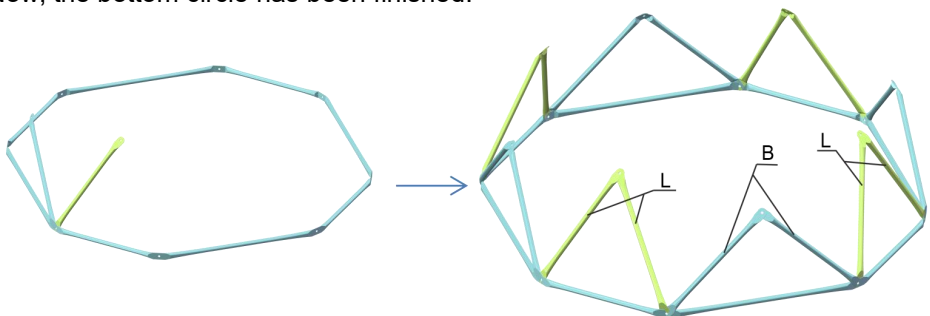

Tips: Every node at the bottom circle will have four pole ends.


Step 2: Second Circle Assembly

First, pick up four medium tubes (L), one Long bolt (E), one normal washer (H) and one thin nut (G).

Second, choose two medium tubes (L) assembled at the bottom circle, then fix the medium tubes together with tools Part I and Part J.

Tips: The order of the poles needs to be the same as the order marked in the following picture.

The outermost pole is pole ⑥, and the final one (also the innermost) is pole ①.

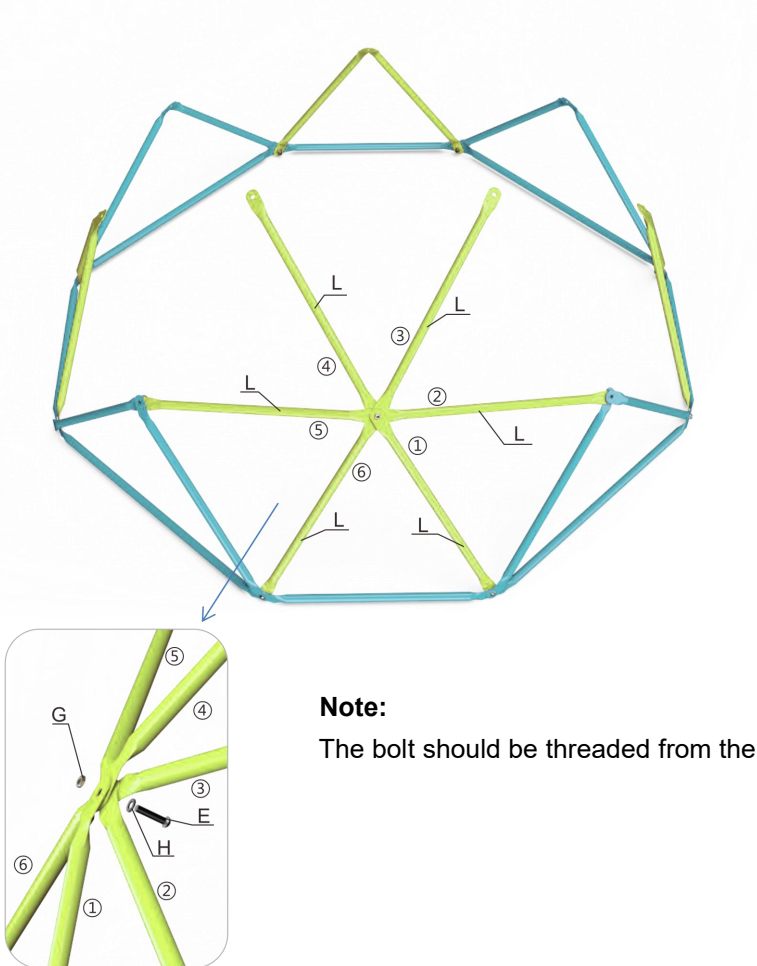

Note:


The bolt should be threaded from the inside out.

Step 3: Second Circle Assembly

First, pick up one short tube (B), one medium tube (L), one long bolt (E), one normal washer (H) and one thin nut (G).

Second, choose two medium tubes assembled at the bottom circle, then fix the poles together with tools part I and part J.


Tips: The order of the poles needs to be the same as the order marked in the following picture. The outermost pole is pole ⑤, the second is pole ④, the third is pole ③, the fourth is pole ②, and the final one (also the innermost) is pole ①.

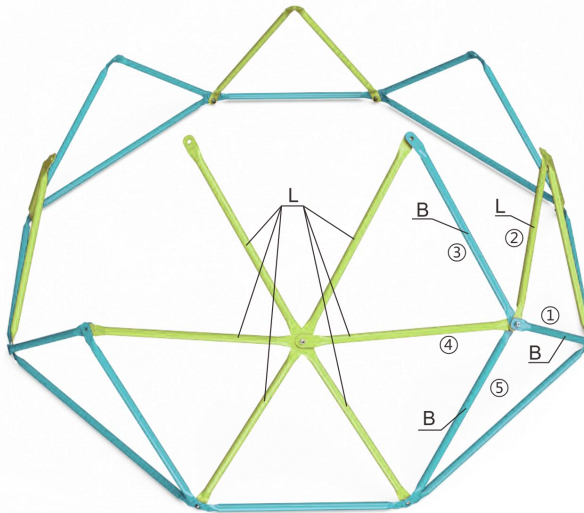

NOTE:

The bolt should be threaded from the inside out.

Then, repeat the operation at Step 2 and Step 3, and you will get the following shape. Now, the second circle has been finished.

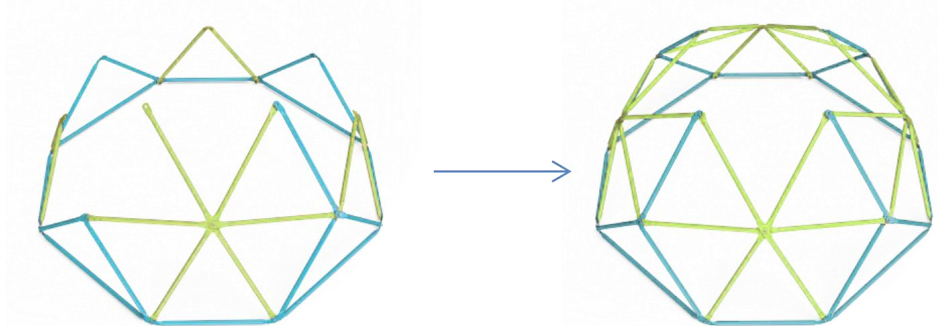


Step 4: Roof Assembly

First, pick up one Supporting tube (M), two short tubes (B), one long bolt (E), one normal washer (H) and one thin nut (G).

Second, choose one of the nodes at the second circle, then fix the poles together with tools Part I and Part J.


Tips: The order of the poles needs to be the same as the order marked in the following picture.

The outermost pole is pole ⑥, the second is pole ⑤, the third is pole ④, the fourth is pole ③, the fifth is pole ② and the final one (also the innermost) is pole ①.

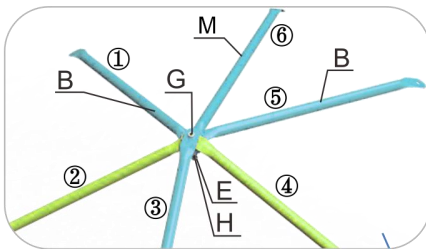


Note:



The bolt should be threaded from the inside out.

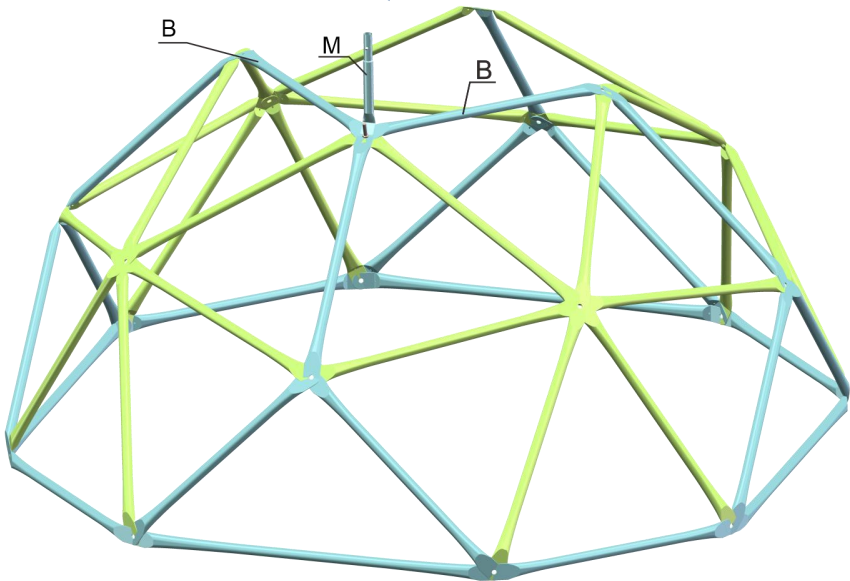



Third: repeat the above operation for the rest nodes.

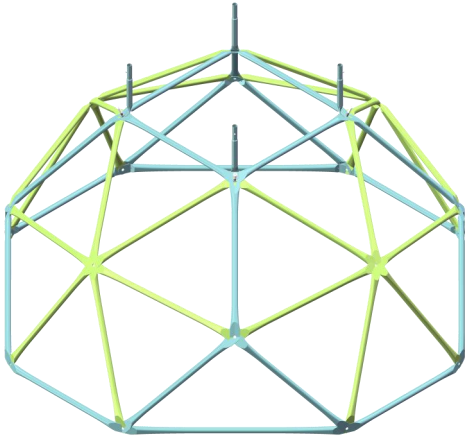

Fourth: Type H Tube Installation.

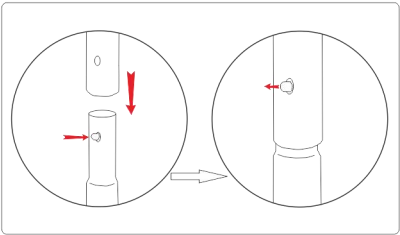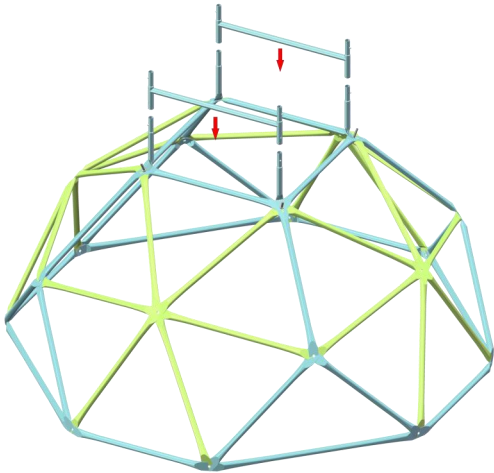

Fifth: Type U Tube Installation.

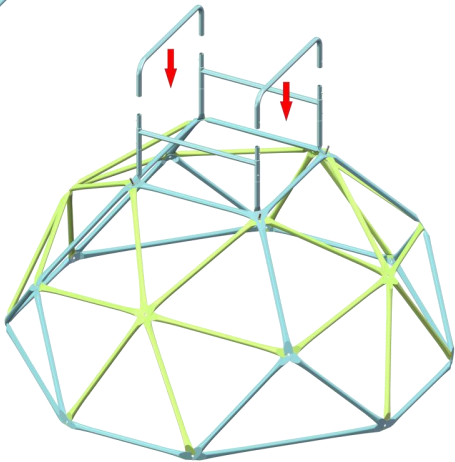
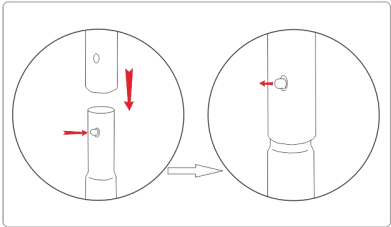


Step 5: Black Grip Assembly (Important: check all fixed fasteners are fully tightened)

First, fasten the black grip (C) on the node. Please using the tool Part I.

NOTE: All of the nodes will need a grip, except the nodes of the bottom circle.

Tips: The gap of the grip needs to be checked in pole ① and pole ⑤ (or pole ⑥) as show in the following picture.

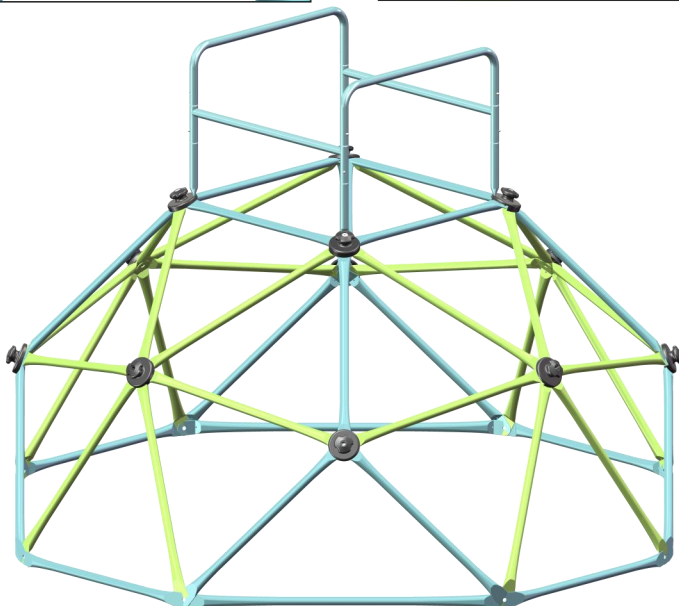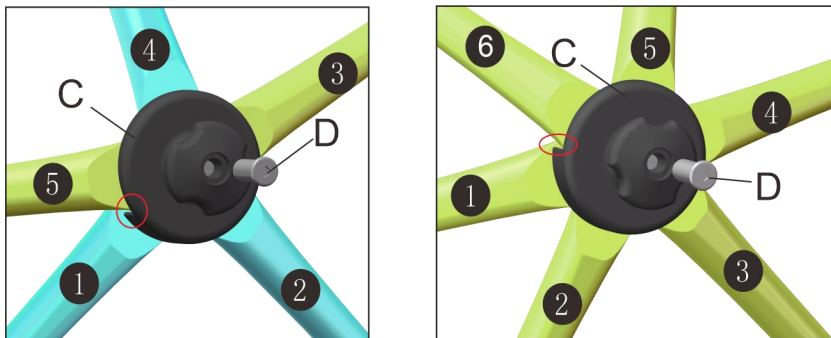

Second, repeat the above operation for the rest nodes.

Now, the assembly of the dome climber is complete, Congratulations!

MAINTENANCE

- Check the poles, handles and screw connections regularly for cracks, damage and material fatigue. If you discover any damage, the scaffolding must not be used. Please contact your seller to replace the damaged items with new ones. Use only original replacement elements!
- Never use aggressive cleaning agents for cleaning!

Disposal

The product packaging consists of recyclable materials. Dispose of them in an environmentally friendly manner and in the collection containers provided.

Manufacturer: YANGZHOU JIUXIN SPORTS TECHNOLOGY CO.,LTD.
Address: NO.6, INDUSTRIAL PARK, XINJI TOWN, YIZHENG,
YANGZHOU CITY, JIANGSU,CHINA

