VEVOR

Affordable. Reliable. Home Improvement.

Pet door

MODEL: SKT-01/SKT-02/SKT-03/SKT-04/SKT-05/SKT-06


VEVOR Support Center

1	SKT-01		2	SKT-02	
3	SKT-03		4	SKT-04	
5	SKT-05		6	SKT-06	

VEVOR
Affordable. Reliable. Home Improvement.

Pet door

MODEL: SKT-01/SKT-02/SKT-03/SKT-04/SKT-05/SKT-06

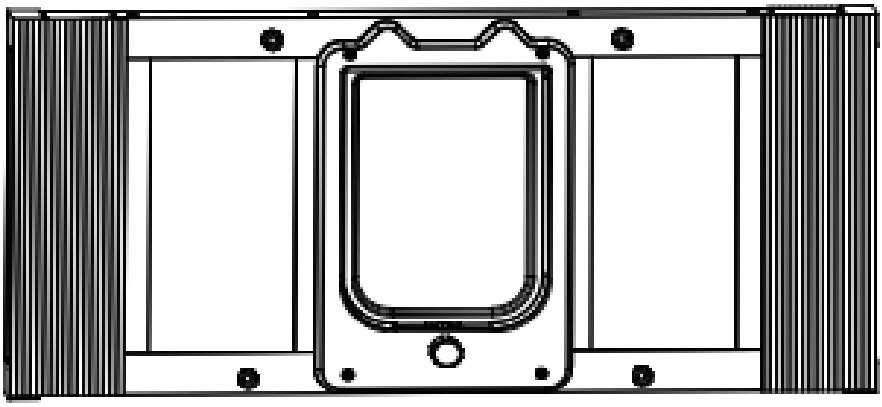


This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

Thank you for choosing our brand. Allow me to introduce you. Cat doors are suitable for various sliding windows, and you can build a gateway to the outside world for your pets. The gray fur strips on both sides of the flaps are very thick. If your cat finds it difficult to pass through the flaps, you can trim the gray fur strips on both sides. If it is still difficult to pass, the magnet is a bit strong for your pet, so don't worry, the suction force of the magnet will weaken a bit in a few months.

MODEL		SKT-01	SKT-02	SKT-03	SKT-04	SKT-05	SKT-06
Range of length	Inch	23-28	27-32		31-36		35-40
	mm	584-711	686-813		787-914		889-1016
colour		white	white	black	white	black	white

Cat door size:7.6"W×10.3"H(192W*262H mm)
Product height:15.28 in(388mm)


Part List

 instruction book ×1	 doorseal ×2	 EVA strip ×1

Installing Your Pet Door For Window


1.Raise your sliding sash window frame to its fully open position and place the pet door assembly between the window sill and the open sash window frame.(A).

A

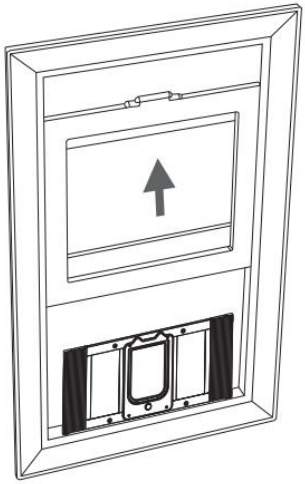


2.Turn the silver knobs counter-clockwise to release the end spacers. Pet door assembly should now fit the window snugly on both ends.(B)


B

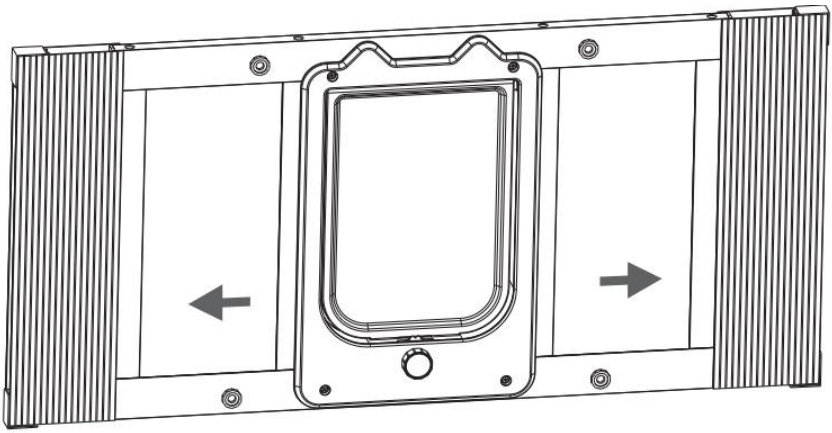

3.Turn silver knobs clockwise to tighten and lock the end spacers in position.(C).

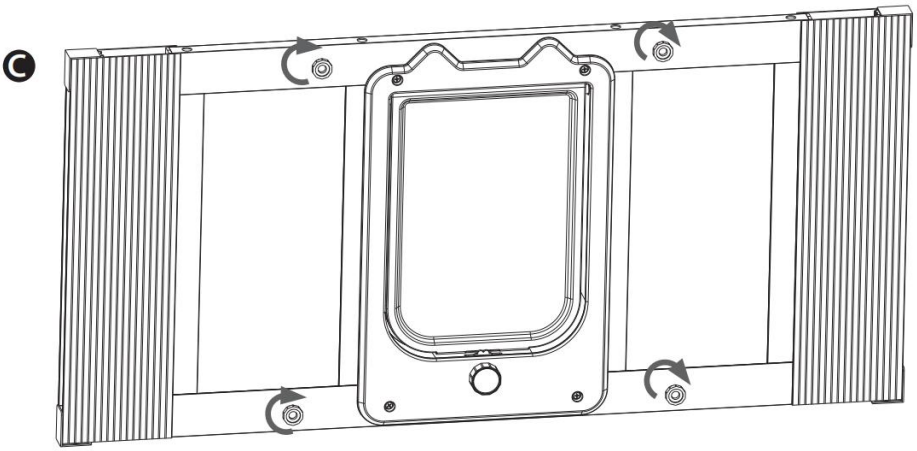


4.To install the Foam Bumper Seal, measure the top of the installed Aluminum Sash Window Pet Door, unroll and cut Foam Bumper Seal to this measurement. Peel off the protective backing and attach along top edge of the pet door, pressing firmly as you go. Lower the sliding sash window frame until it touches onto the Foam Bumper Seal.(D)

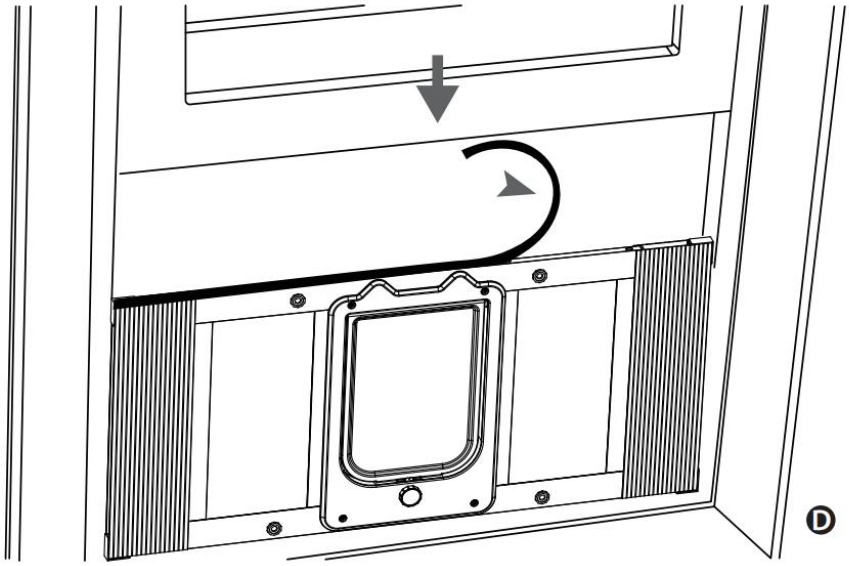


5.To install the Foam Bumper Seal, measure the top of the installed Aluminum Sash Window Pet Door, unroll and cut Foam Bumper Seal to this measurement. Peel off the protective backing and attach along top edge of the pet door, pressing firmly as you go. Lower the sliding sash window frame until it touches onto the Foam Bumper Seal.(D)

Ⓔ

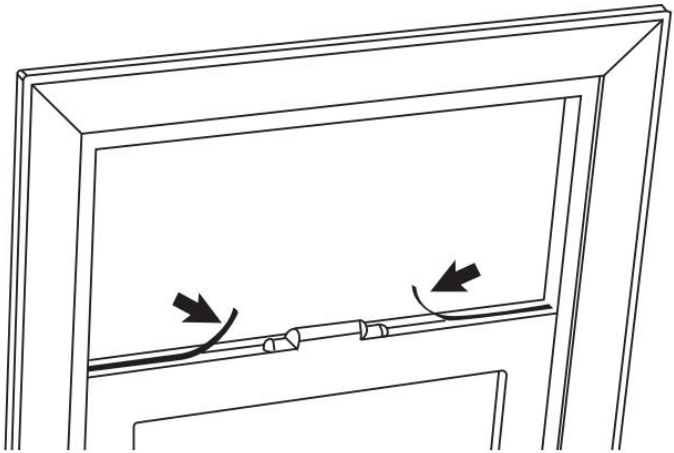

Train your pet

6.Bring your pet to the pet door.Temporarily tape both faps up and try to talk your pet into going through. If your pet will not go through the door do not force him through the door, simply wait for your pet to go through on his own.(F)

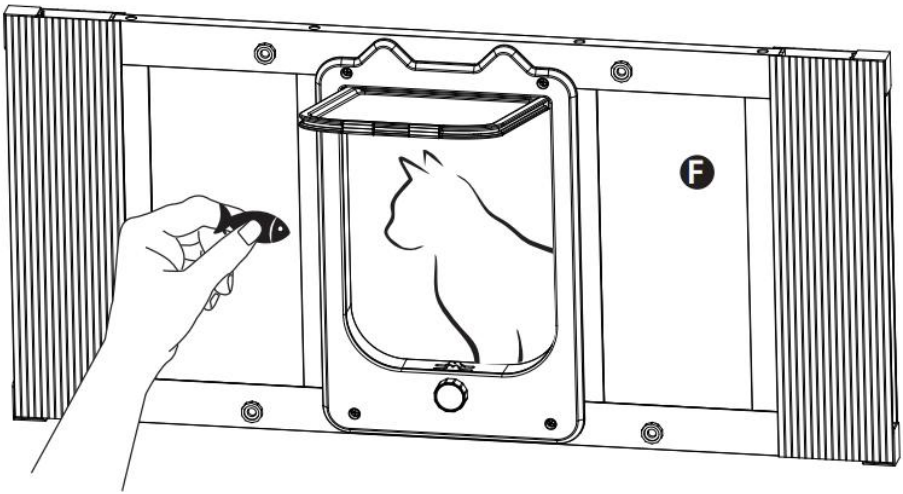

Useful Tip:

Sometimes it helps for you to be on one side of the door and your pet on the other. You may try persuading your pet through the door using a small piece of food or a treat.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi
Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
EC REP: E-CrossStu GmbH.
Mainzer Landstr.69, 60329 Frankfurt am Main.
UK REP: YH CONSULTING LIMITED.
C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX
Imported to AUS: SIHAO PTY LTD.
1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd.
Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

