

VEVOR

Upgrade · The Home Creator Way

VOLTAGE CONVERTER

**MODEL:HYMG-500VA/ HYMG-1000VA/ HYMG-1500VA/
HYOG-500VA/ HYOG-1000VA/ HYOG-1500VA**

VEVOR Support Center

1	HYMG-500VA		2	HYOG-500VA	
3	HYMG-1000VA		4	HYOG-1000VA	
5	HYMG-1500VA		6	HYOG-1500VA	

VEVOR

Upgrade The Home Creator Way

**MODEL: HYMG-500VA/ HYMG-1000VA/ HYMG-1500VA/
HYOG-500VA/ HYOG-1000VA/ HYOG-1500VA**



(The picture is for reference only, please refer to the actual object)

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	Warning-To reduce the risk of injury, user must read instructions manual carefully.
	This product is subject to the provision of European Directive 2012/19/EC. The symbol showing a wheeled bin crossed through indicates that the product requires separate refuse collection in the European Union. This applies to the product and all accessories marked with this symbol. Products marked as such may not be discarded with normal domestic waste, but must be taken to a collection point for recycling electrical and electronic devices

The product complies with relevant standards and regulations. Installation of this device must comply with all applicable regulations, and it should only be operated in well-ventilated areas. Please read the user manual before installing and using this equipment.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children shall not play with the appliance.

This appliance shall not be used by children. Keep the appliance and its cord out of reach of children.

Please properly keep product. Check whether the product is abnormal before use. If it is abnormal, please stop using it.

Please use the product according to the intended use, warn of potential injury from misuse.

Switch off the appliance and disconnect from supply before changing accessories or approaching parts that move in use.

always disconnect the appliance from the supply if it is left unattended and before assembling, disassembling or cleaning.

WARNING: Only use the supply unit provided with this appliance.

"Before use, confirm input voltage matches local mains voltage. Do not connect to voltage exceeding the rating, as it may cause fire or failure.

This converter is for indoor dry use only. Do not use in rain, damp or wet locations.

Do not overload. Output power must not exceed rated power. Do not connect too many devices at the same time.

Disconnect power before wiring, installation or moving. Do not operate with power on.

The converter must be properly grounded. Do not use without grounding.

Do not disassemble, modify or repair this device. Unauthorized service may cause electric shock or fire.

Use only for appliances specified on the label. Do not use for medical equipment, life support systems, safety control devices or critical applications.

Stop use immediately if power cord or plug is damaged. Replace by qualified personnel only.

Do not cover or block ventilation holes. Keep well-ventilated and away from flammable materials during use.

If abnormal noise, odor, smoke or overheating occurs, disconnect power immediately.

Keep out of reach of children. Untrained persons must not operate.

Do not place in unstable or vertical position to prevent falling or short circuit.

For use with rated frequency (50/60Hz) appliances only. Not suitable for variable frequency or inductive loads (e.g. motors) unless marked.

Case may become warm during operation. This is normal; do not touch hot surfaces.

In case of short circuit or tripping, check load appliances before restarting."

ATTENTION

The voltage input range of this product can be selected by toggle switch, please check that the voltage of the mains and the switching voltage of the product should be consistent before powering on.

1.PRODUCT PARAMETERS

Model	HYMG-500VA	HYMG-1000VA	HYMG-1500VA	HYOG-500VA	HYOG-1000VA	HYOG-1500VA
Input voltage	AC110V±15% or AC 220V±15%					
Output voltage	AC110V±15% and AC 220V±15%					
Output power	500VA	1000VA	1500VA	500VA	1000VA	1500VA
Overload protector	5A	10A	15A	5A	10A	15A
Operating temperature	-30℃~55℃					
relative humidity	5%~95%					

2.Instructions for use of the product

Set the input toggle switch of the product to a position consistent with the mains voltage.(As shown in the figure below).

A. Set the input toggle switch of the product to a position consistent with the mains voltage.(As shown in the figure below).

The input voltage is 220V-240V rule Switch to position 220



The input voltage is 100V-120V rule Switch to position 110



B.Insert the input power cord into the end of the product, and then insert the plug of the power cord into the mains outlet.

☆Note:Before plugging in the mains, please check whether the position of the input voltage transfer switch is consistent with the mains voltage.

C.Please use the load according to the voltage of the panel output socket, the load power must be less than the nominal power of the device, and the recommended load power is **60%** of the rated power.

☆Because the equipment itself has a certain loss, the load use power must be less than the nominal power of the equipment, otherwise there is a risk of damage to the equipment.


Notes:

a.This equipment is equipped with an overcurrent fuse (500VA or 1500VA), which will blow when the load exceeds the load of the equipment. When you find that there is no output, check the replacement fuse.

b.This equipment has an overload protection switch, when the load exceeds the load of the equipment, the overload protection switch will automatically spring up and disconnect the output; When the load overload is solved, you can press the overload protection by hand to open it and resume work.

c.This equipment is equipped with an air switch, when the load is overloaded for a long time, or the load is short-circuited, the air switch will immediately turn off the output, thereby protecting the equipment from damage. When the load fault is lifted, close the air again and open it, and it can work normally.

Device panel:

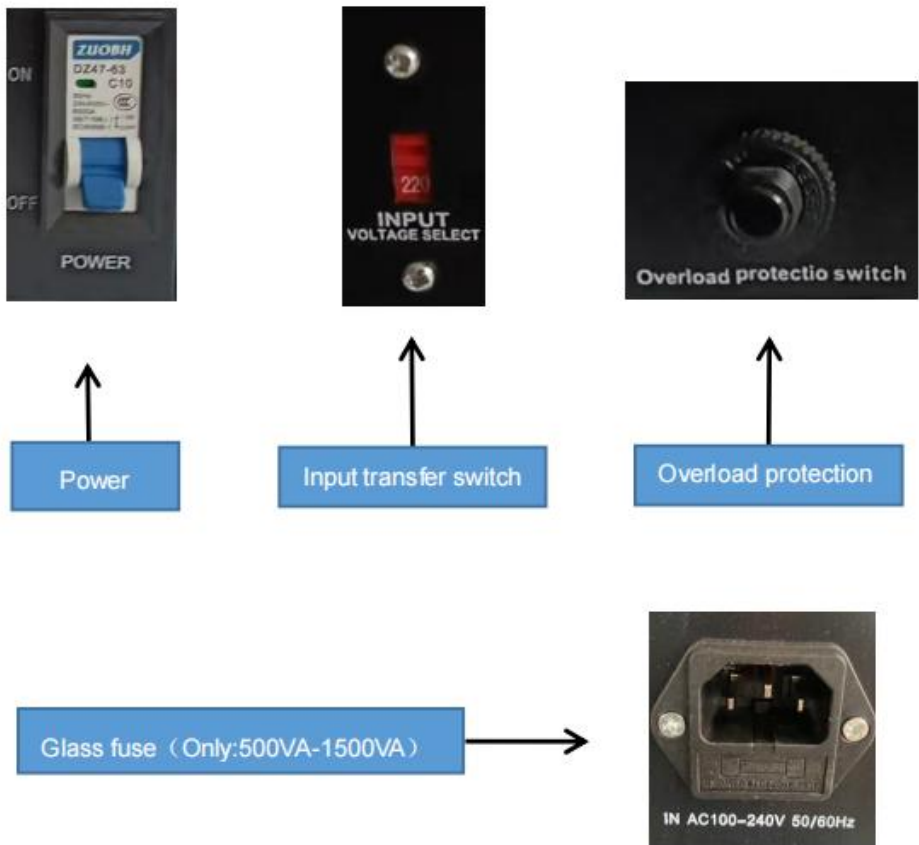

Warning:

This equipment is a high voltage device, please do not attempt to disassemble this equipment at any time to avoid danger. After a device failure, if the external switch fails to restart the device, please contact your reseller for handling.

